

10-02-00

A

UTILITY PATENT APPLICATION TRANSMITTAL

(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
36409-00300

Total Pages in this Submission
89

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

WIRELESS COMMUNICATION SYSTEM CAPABLE OF CHANGING DYNAMICALLY CHARGE RATE AND WIRELESS COMMUNICATION UNIT USABLE THEREWITH

and invented by:

Masashi Hamada

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 60 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
36409-00300

Total Pages in this Submission
89

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 22
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)* ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL548114907US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
36409-00300

Total Pages in this Submission
89

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	27	- 20 =	7	x \$18.00	\$126.00
Indep. Claims	10	- 3 =	7	x \$78.00	\$546.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,362.00

- ☒ A check in the amount of **\$1,362.00** to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. **13-3250** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☐ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Dated: September 29, 2000

Tedd W. Van Buskirk, Esq.
Reg. No. 46,282
Milbank, Tweed, Hadley & McCloy, LLP
1 Chase Manhattan Plaza
New York, NY 10005-1413

cc:

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)Docket No.
36409-00300Applicant: **Masashi Hamada**Serial No.: **To Be Assigned**Date Filed: **To Be Assigned**Group Art Unit: **To Be Assigned**For: **WIRELESS COMMUNICATION SYSTEM CAPABLE OF CHANGING DYNAMICALLY
CHARGE RATE AND WIRELESS COMMUNICATION UNIT USABLE THEREWITH**

I hereby certify that this :

Certificate of Mailing by Express Mail; Patent Application For Utility Patent (Large Entity); Patent Application consisting of 60 pages of specification and 22 sheets of drawings; a check in the amount of \$1362.00 to cover the patent application fee; Unexecuted Declaration and Power of Attorney; and an acknowledgment postcard


are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on:

September 29, 2000

Date

Carl F. Emigholz

Typed Name of Person Mailing Correspondence



Signature of Person Mailing Correspondence

EL548114907US

("Express Mail" Mailing Label Number)

JC925 U.S. PTO
09/676685
09/29/00

Wireless Communication System Capable
of Changing Dynamically Charge Rate And
Wireless Communication Unit Usable Therewith

5 Background of the Invention

Field of the Invention

The present invention relates to a wireless
communication system and a wireless communication
terminal, and more particularly to a wireless
10 communication system capable of changing dynamically a
charge rate and a wireless communication unit which can
be used in the wireless communication system.

Related Background Art

Conventional cellular wireless communication
15 systems for public use, relying on a micro cell or the
like, including PDC (Personal Digital Cellular), PHS
(Personal Handyphone System), and GSM (Global System
for Mobile communications), make use of, as a parameter
for changing the communication fee (charge rate),
20 static information such as a charge condition (service
plan) agree upon when the user of a wireless
communication terminal subscribes the service provided
by a carrier, or communication time.

Accordingly, such wireless communication systems
25 do not use dynamic information (a communication traffic
volume or a remaining wireless resource amount) as a
parameter for changing a charge rate, so that it is not

possible to charge minutely depending on a situation for each wireless cell at the place or time where communication occurs.

In Japanese Patent Application Laid-Open No. 5-183495, it is disclosed that in order to make effective use of wireless resources within a wireless communication system, a new call is limited by setting the service charge for a newly arising call to be higher than the ordinary fee, if the traffic volume of service channel in a wireless base station has exceeded a predetermined value. Also, in Japanese Patent Application Laid-Open No. 5-183495, it is disclosed that the fee information notified from a wireless base station is output by voice or images at a mobile station such as a portable telephone, so that the user can determine whether to make a call or not.

Further, in European Patent EP0597638A1, it is disclosed that the charge rate is changed in accordance with the volume of service channel in a wireless base station, and the user can make a call after confirming the charge rate for use.

However, in Japanese Patent Application Laid-Open No. 5-183495 and EP 0597638A1, there is no consideration about how to notify the fee information from a wireless base station to a mobile station.

Also, in USP No. 5,303,297 (Japanese Patent Application Laid-Open No. 5-199331), it is disclosed

that on a call request, a charge rate is determined by calculating the utilization factor for all the available resources in both wired section and wireless section which are usable for a communication between a
5 calling terminal and a called terminal, and is notified to the calling terminal.

However, with a method of determining the charge rate in accordance with the amount of service resources including the wired section, as in USP No. 5,303,297
10 (Japanese Patent Application Laid-Open No. 5-199331), there is the problem that the calculation of charge rate is complicated, and it takes longer time to calculate the charge rate. To calculate the charge rate, the service situation for all the paths from the
15 calling terminal to the called terminal must be examined, and traffic is further increased to communicate the information as to the service situation. Also, load on the system would be increased.

20 In the conventional examples as described above, when the charge rate is changed dynamically in accordance with the amount of service resources for the wireless base station or the whole system, no consideration is taken as to how to notify the charge
25 rate.

Also, in the conventional examples, no consideration is taken as to how to change the charge

rate to be optimal for the user.

Further, usability of the terminal in the system in which the charge rate is dynamically changed is not considered.

5

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a method of notifying a charge rate from a wireless control station to a wireless communication unit, when the charge rate is changed dynamically.

It is another object of the invention to provide an optimal method of changing the charge rate.

It is a further object of the invention to provide improvements in usability of a wireless communication terminal for use with a communication system in which charge rate can be changed dynamically.

Other objects of the invention will be apparent from the following description and drawings.

20 Brief Description of the Drawings

Fig. 1 is a system configuration view showing the whole of a wireless communication system according to first to fourth embodiments of the present invention;

Fig. 2 is a block diagram showing an internal configuration of a wireless communication terminal used for explaining the embodiments of the invention;

Fig. 3 is a block diagram showing an internal

configuration of a wireless base station used for explaining the embodiments of the invention;

Fig. 4 is a schematic diagram showing a format of an informing signal that is sent out from a wireless
5 base station of a wireless communication system used for explaining the embodiments of the invention;

Fig. 5 is a view showing the relation between a charge rate per unit of time within a wireless cell and a remaining amount of wireless resources within the
10 wireless cell which is controlled by a wireless base station of a wireless communication system used for explaining the first to fourth embodiments of the invention;

Fig. 6 is a flowchart showing a process in which
15 the wireless base station of the wireless communication system changes the present charge rate per unit of time and sets it in an informing signal according to a first embodiment of the invention;

Fig. 7 is a schematic diagram showing a format of
20 an individual communication information signal on an individual physical channel that is sent out from the wireless base station of the wireless communication system used for explaining the embodiments of the invention;

Fig. 8 is a flowchart showing a process in which
25 the wireless base station of the wireless communication system changes the present charge rate per unit of time

and sets it in an individual communication information signal according to a second embodiment of the invention;

Fig. 9 is a flowchart showing a process in which
5 the wireless communication terminal receives an informing signal while it is waiting according to a third embodiment of the invention;

Fig. 10 is a flowchart showing a process for
10 making a call operation by a user of the wireless communication terminal according to the third embodiment of the invention;

Fig. 11 is a flowchart showing a process in which
15 the wireless communication terminal receives an individual communication information signal while it is communicating according to a fourth embodiment of the invention;

Fig. 12 is a system configuration view showing the whole of a wireless communication system according to fifth to seventh embodiments of the invention;

Fig. 13 is a block diagram showing an internal
20 configuration of a wireless network controller according to the fifth to seventh embodiments of the invention;

Fig. 14 is a diagram showing the relation between
25 a charge rate per unit of time within a wireless cell and a remaining amount of wireless resources within the wireless cell which is controlled by a wireless base

station of the wireless communication system used for explaining the fifth to seventh embodiments of the invention;

5 Fig. 15 is a flowchart showing a process in which the wireless network controller changes the present charge rate per unit of time and notifies the changed charge rate according to the fifth embodiment of the invention;

10 Fig. 16 a flowchart showing a process in which the wireless base station changes the charge rate according to the fifth embodiment of the invention;

15 Fig. 17 is a conceptual diagram of control sequence in which a wireless communication terminal makes a call connection by establishing a wireless link with a plurality of wireless base stations according to the sixth embodiment of the invention;

20 Fig. 18 is a conceptual diagram of control sequence in which a wireless communication terminal makes a call connection by establishing a wireless link only with a service wireless base station according to the sixth embodiment of the invention;

 Fig. 19 is a flowchart showing a process for a service wireless network controller according to the sixth embodiment of the invention;

25 Fig. 20 is a flowchart showing a process for a drift wireless network controller according to the sixth embodiment of the invention;

Fig. 21 is a flowchart showing a process for a service wireless network controller according to a seventh embodiment of the invention; and

Fig. 22 is a flowchart showing a process for a wireless base station according to the seventh embodiment of the invention.

Description of the Preferred Embodiments

The preferred embodiments of the present invention will be described below with reference to the drawings. (First embodiment)

Referring to Figs. 1 to 3, a wireless communication system according to a first embodiment of the present invention will be described below. This wireless communication system is presumed to be roaming, and uses a mobile communication system of a wideband CDMA (W-CDMA) (Wideband code division multiple access) which is a candidate for the IMT2000 (International Mobile Telecommunication 2000) system.

Fig. 1 is a system configuration view showing the whole of the wireless communication system according to the first embodiment of the invention.

In Fig. 1, a wireless cell 100 which is controlled by a wireless base station 101 is a cell having a high communication traffic volume (i.e., a high traffic wireless cell) for accommodating a great number of wireless communication terminals 103. In the wireless

cell 100, each of the wireless communication terminals 103 is connected to the wireless base station 101 via a wireless communication line. A wireless cell 110 which is controlled by a wireless base station 111 is a cell
5 having a low communication traffic volume (i.e., a low traffic wireless cell) for accommodating a small number of wireless communication terminals 103. In the wireless cell 110, each of the wireless communication terminals 103 is connected to the wireless base station
10 111 via a wireless communication line.

The wireless base stations 101, 111 are connected to an external communication network 12 via a switching facility 10 which is managed by the carrier. The switching facility 10 is connected to a charge control
15 center 11 for managing the charge of a wireless communication terminal 103. Each of the informing signals 102, 112 which the wireless base stations 101, 111 send out is a signal for notifying a situation of the wireless communication system to the wireless
20 communication terminal 103 which is waiting within each of the wireless cells 100, 110 which is controlled by each of the wireless base stations 101, 111, and periodically transmitted. Of course, the number of wireless base stations 101, 111 and the number of
25 wireless communication terminal 103 are not limited to those as shown in the figure.

Fig. 2 is a block diagram showing an internal

configuration of the wireless communication terminal
103 of Fig. 1. In Fig. 2, the wireless communication
terminal 103 is configured by a wireless unit 301 for
effecting transmission and reception of a radio wave
5 coupled with an antenna 314, a base band unit 302 for
modulating and demodulating a signal, which is
connected to the wireless unit 301, an operation unit
303 for inputting the dial information and so on, an
audio processing unit 304 for making conversion between
10 a digital signal and an audio signal, which is
connected to a telephone transmitter 310 and a
telephone receiver 311, a wireless communication frame
assemble/disassemble unit 305 for assembling the
digital information into a data frame corresponding to
15 the wireless communication system, and disassembling
the data frame, the wireless communication frame
assemble/disassemble unit 305 being connected to the
audio processing unit 304, a RAM 306 for storing
temporarily various kinds of information, a ROM 307 for
20 storing a control program and so on, a control unit 308
for controlling each unit in accordance with the
control program, which is connected to each unit, a
battery 309 for supplying an electric power to each
unit, which is a typical secondary cell, a display unit
25 312 for displaying various kinds of information, and an
IC card 313 for storing the user information such as
subscriber information and an electronic directory.

Fig. 3 is a block diagram showing an internal configuration of a wireless base station 101 of Fig. 1. In Fig. 3, the wireless base station 101 is configured by a wireless unit 401 for effecting transmission and reception of a radio wave coupled with an antenna 409, a base band unit 402 for modulating and demodulating a signal, which is connected to the wireless unit 401, a wired communication frame assemble/disassemble unit 403 for assembling the digital information into a data frame corresponding to a wired communication system, and disassembling the data frame, a wireless communication frame assemble/disassemble unit 404 for assembling the digital information into a data frame corresponding to a wireless communication system, and disassembling the data frame, the wireless communication frame assemble/disassemble unit 404 being connected to the base band unit 402 and the wired communication frame assemble/disassemble unit 403, a RAM 405 for storing temporarily various kinds of information, a ROM 406 for storing a control program and so on, a control unit 407 for controlling each unit in accordance with the control program, and a wired unit 408 which is an interface portion with a wired channel, the wired unit being connected to the wired communication frame assemble/disassemble unit 403 and an external wired channel. A wireless base station 111 has the same configuration as above, and explanation

will be given below only of the wireless base station 101.

Fig. 4 is a schematic view showing a format of an informing signal 102 which is sent out from the wireless base station 101 of the wireless communication system according to the first embodiment of the invention. In Fig. 4, an informing signal identification information field 21 indicates that the signal is an informing signal, and a transmission power information field 22 indicates the transmission power of the informing signal 102. A frame number 23 is to enable recognition of the continuity of data to a wireless communication terminal 103, and an interference information field 24 indicates an information format of an informing signal 102 transmitted from the wireless base station 101 to the wireless communication terminal 103. A detail of information elements field 25 is used to notify the system control information, and is constituted of a carrier identification information field 251, a wireless base station identification information field 252, and so on. An error correcting code 26 is to detect and correct an error which occurs during transmission of the signal.

In this embodiment, as a new constituent element in the detail of information elements field 25 within the informing signal 102, there is provided in an

information field 253 of charge rate per unit of time in wireless cell which is an area for storing the charge rate information per unit of time in the wireless cell 100. Consequently, the charge rate
5 information per unit of time can be notified in real time to the wireless communication terminal 103 which is waiting in the wireless cell 100.

Referring now to Figs. 5 and 6, explanation will be given below of a processing in which the wireless
10 base station 101 changes the charge rate per unit of time depending on the remaining amount of wireless resources in the wireless cell 100 controlled by the wireless base station 101, and notifies the charge rate to the wireless communication terminal 103 which is
15 waiting. Fig. 5 is a view showing the relation between the charge rate per unit of time in the wireless cell 100 and the remaining amount of wireless resources in the wireless cell 100, which is controlled by the wireless base station 101 of the wireless communication
20 system according to the first embodiment of the invention. In Fig. 5, the charge rate per unit of time is indicated along the axis of ordinate, and the remaining amount of wireless resources in the wireless cell (amount of individual physical channels available)
25 along the axis of abscissa. In this embodiment, the remaining amount of wireless resources indicating a predetermined situation in the wireless cell 100 will

be described later as the parameter for changing the charge rate per unit of time, but the communication traffic volume in the wireless cell 100 may be also applied.

5 In Fig. 5, the charge rate down thresholds 72, 74 are charge rate change thresholds for lowering the charge rate per unit of time, when the number of wireless communication terminals 103 decreases (or the remaining amount of wireless resources in the wireless cell increases) which are connected wireless in the
10 wireless cell 100 controlled by the wireless base station 101. The charge rate up thresholds 71, 73 are charge rate change thresholds for raising the charge rate per unit of time, when the number of wireless
15 communication terminals 103 increases (or the remaining amount of wireless resources in the wireless cell decreases) which are connected wireless in the wireless cell 100 controlled by the wireless base station 101. An acceptable charge price setting 75 is an acceptable
20 charge rate that can be preset by the user. The acceptable charge price setting 75 is stored in the RAM 306 for the wireless communication terminal 103. A price range of alarm display indicates a range of charge rate going beyond the acceptable charge price
25 setting 75, and an acceptable price range for calling indicates a range of charge rate falling below the acceptable charge price setting 75.

Fig. 6 is a flowchart showing a processing in which the control unit 407 in the wireless base station 101 of the wireless communication system controls each unit to change the present charge rate per unit of time and set it in an informing signal 102 according to the first embodiment of the invention. In Fig. 6, the control unit 407 of the wireless base station 101 investigates the remaining amount of wireless resources in the controlled wireless cell 100 (step S501). Then, a comparison is made between the charge rate corresponding to the remaining amount of wireless resources in the wireless cell 100 which is investigated by the control unit 407 and the thresholds of changing charge rate (charge rate up thresholds 71, 73 and charge rate down thresholds 72, 74) which are stored in the RAM 405 (step S502). A determination is made whether or not the charge rate corresponding to the remaining amount of wireless resources in the wireless cell exceeds the thresholds 72, 74 of reducing the charge rate (step S503). As a result of this determination, if the charge rate corresponding to the remaining amount of wireless resources in the wireless cell does not exceed the thresholds 72, 74 of reducing the charge rate, the operation proceeds to step S505.

In step S505, a determination is made whether or not the charge rate corresponding to the remaining amount of wireless resources in the wireless cell 100

is below the thresholds 71, 73 of raising the charge rate. As a result of determination, if it is not below the thresholds 71, 73 of raising the charge rate, the present charge rate per unit of time is set to the
5 charge rate information 253 per unit of time in the wireless cell of the informing signal 102 (step S508). Then, this process ends. As a result, the charge rate is not changed, and the same charge rate is continuously used.

10 On the other hand, as a result of determination in step S503, if the charge rate corresponding to the remaining amount of wireless resources in the wireless cell is above the thresholds 72, 74 of reducing the charge rate, the charge rate per unit of time is
15 reduced (step S504). The present charge rate per unit of time is notified to a core network including the switching facility 10 and the charge control center 11 which are interconnected (step S507). Then a process in step S508 is performed. Thereafter, this process
20 ends.

As a result of determination in step S505, if the charge rate corresponding to the remaining amount of wireless resources in the wireless cell is below the thresholds 71, 73 of raising the charge rate, the
25 charge rate per unit of time is raised (step S506). Then the process in steps S507 and S508 is performed. Thereafter, this process ends.

According to the first embodiment of the invention, the wireless base stations 101, 111 change the present charge rate per unit of time in accordance with the remaining amount of wireless resources in the wireless cells 100, 110 which is a dynamic information parameter (steps S501 to S506), set the thus-changed charge rate information in the charge rate per unit of time information in wireless cell 253 which is provided as a new constituent element within the informing signals 102, 112 which the wireless base stations 101, 111 transmit regularly (step S508). Thereby, the changed charge rate is notified to the wireless communication terminal 103 which is waiting in the wireless cells 100, 110, without connecting a wireless line. Accordingly, the wireless resources in the wireless cells 100, 110 can be effectively utilized, and the user of the wireless communication terminal 103 can grasp the communication fee (charge rate) before making line connection, to effect communication within the limit of budgetary appropriation of the user.

Also, the thresholds for raising the charge rate and the thresholds for reducing the charge rate are set at different values, namely, the thresholds 71, 72 or the thresholds 73, 74 are set at different values which are separated by a predetermined interval, and the charge rate is changed based on the threshold having a hysteresis characteristic. Thereby, even in the case

where the remaining amount of wireless resources in the wireless cell or the communication traffic volume in the wireless cell is varied near the threshold, it is possible to suppress the charge rate from being changed too frequently.

Since the charge rate is set in the informing signal at all times, a new wireless communication terminal which has moved into the wireless cell can readily recognize the charge rate.

(Second embodiment)

Referring to Figs. 5, 7 and 8, explanation will be given below of a processing in which the control unit 407 of the wireless base station 101 in the wireless communication system controls each unit to change the charge rate per unit of time in accordance with a predetermined situation in the wireless cell 100 and notify it to the wireless communication terminal 103 which is communicating according to a second embodiment of the invention. Fig. 7 is a schematic view showing a format of an individual communication information signal on the individual physical channel, which is transmitted from the wireless base station 101 of the wireless communication system according to the second embodiment of the invention.

In Fig. 7, a frame identification information field 81 indicates that the signal is an individual communication information signal, and an accompanying

control information field 82 is an information
transmission area for superimposing and transmitting
the system control information which can be transmitted
during communication (service). A communication
5 information field 83 is for transmitting the user data
(voice, data, etc.) for communication, and an error
correction code 84 is for detecting and correcting an
error which occurs in transmitting the signal.

In this embodiment, as a new constituent element
10 of the accompanying control information field 82, there
is provided an information field 821 of charge rate per
unit of time in wireless cell which is an area for
storing the charge rate information per unit of time in
the wireless cell 100. Consequently, the present
15 charge rate information per unit of time in the
wireless cell 100 can be notified in real time to the
wireless communication terminal 103 which is
communicating in the wireless cell 100.

Fig. 8 is a flowchart showing a processing in
20 which the wireless base station 101 of Fig. 1 changes
the charge rate per unit of time and sets it within an
individual communication information signal. In Fig.
8, the control unit 407 of the wireless base station
101 investigates the remaining amount of wireless
25 resources in the controlled wireless cell 100 (step
S801). Then, a comparison is made between the charge
rate corresponding to the remaining amount of wireless

resources in the wireless cell which is investigated by the control unit 407 and the thresholds for changing the charge rate (thresholds 71, 73 for raising the charge rate and thresholds 72, 74 for reducing the charge rate) which are stored in the RAM 405 (step S802). A determination is made whether or not the charge rate corresponding to the remaining amount of wireless resources in the wireless cell exceeds the thresholds 72, 74 of reducing the charge rate (step S803). As a result of this determination, if the charge rate corresponding to the remaining amount of wireless resources in the wireless cell does not exceed the thresholds 72, 74 of reducing the charge rate, the operation proceeds to step S805.

15 In step S805, a determination is made whether or not the charge rate corresponding to the remaining amount of wireless resources in the wireless cell is below the thresholds 71, 73 of raising the charge rate. As a result of determination, if it is not below the thresholds 71, 73 of raising the charge rate, the present charge rate per unit of time is set to the information field 821 of charge rate per unit of time in the wireless cell which resides within the accompanying control information field 82 of the individual communication formation signal (step S808). Then, this process ends. As a result, the charge rate is not changed, and the same charge rate is

continuously used.

On the other hand, as a result of determination in step S803, if the charge rate corresponding to the remaining amount of wireless resources in the wireless cell is above the thresholds 72, 74 of reducing the charge rate, the charge rate per unit of time is reduced (step S804). The present charge rate per unit of time is notified to a core network connected to the charge control center 11 (step S807). Then a process in step S808 is performed. Thereafter, this process ends.

As a result of determination in step S805, if the charge rate corresponding to the remaining amount of wireless resources in the wireless cell is below the thresholds 71, 73 of raising the charge rate, the charge rate per unit of time is raised (step S806). Then the process in steps S807 and S808 is performed. Thereafter, this process ends.

According to the second embodiment of the invention, the wireless base stations 101, 111 change the present charge rate per unit of time information in accordance with the remaining amount of wireless resources in the wireless cells which is a dynamic information parameter (steps S801 to S806), set the thus-changed charge rate information to the information field 821 of charge rate per unit of time in wireless cell which is provided as a new constituent element

within the individual communication information signal on the individual physical channel which the wireless base stations 101, 111 transmit (step S808). Thereby, the changed charge rate is notified to the wireless communication terminal 103 which is communicating within the wireless cells 100, 110, without obstructing communication of the user. Accordingly, the wireless resources in the wireless resources 100, 110 can be effectively utilized, and the user of the wireless communication terminal 103 can grasp in real time the communication fee (charge rate) during communication, to effect communication within the limit of budgetary appropriation of the user.

Also in this embodiment, the charge rate is changed based on the threshold having a hysteresis characteristic. Thereby, it is possible to suppress the charge rate from being changed too frequently during communication.

(Third embodiment)

Referring to Figs. 5 and 9, explanation will be given below of a processing in which the wireless communication terminal 103 which is waiting receives an informing signal 102 in the wireless cell 100 controlled by the wireless base station 101. Fig. 9 is a flowchart showing a processing in which the wireless communication terminal 103 receives an informing signal 102 while it is waiting according to a third embodiment

of the invention. A set allowable charge price 75 (allowable charge rate) which has been preset arbitrarily by the user is stored in the RAM 306 of the wireless communication terminal 103.

5 In Fig. 9, the wireless communication terminal 103 which is waiting in the wireless cell 100 controlled by the wireless base station 101 receives an informing signal 102 which is regularly transmitted from the wireless base station 101 (step S901). Then, the
10 present charge rate per unit of time is read from the information field 253 of charge rate per unit of time in the wireless cell which resides in the detail of information elements field 25 for the informing signal 102 that has been received, and stored in the RAM 306
15 (step S902). Subsequently, a determination is made by the control unit 308 of Fig. 2 whether or not the present charge rate per unit of time stored in the RAM 306 in step S902 is equal to or less than the acceptable charge price setting 75 (acceptable charge
20 rate) (step S903). As a result of this determination, if the charge rate is no less than the acceptable charge rate (or exceeds the acceptable charge rate setting 75), the information of alarm display for calling to effect alarm display is set up when the user
25 makes a calling operation (step S905). Then, this process ends.

On the other hand, as a result of determination in

step S903, if the present charge rate per unit of time is equal to or less than the acceptable charge rate, the information of alarm display for calling is cleared (step S904). Then, this process ends.

5 Referring now to Fig. 10, explanation will be given below of a processing for handling a calling operation by the user in the wireless communication terminal 103 according to the third embodiment of the invention. Fig. 10 is a flowchart showing the
10 processing for handling a calling operation by the user in the wireless communication terminal 103 according to this embodiment of the invention. In Fig. 10, when there is a calling operation by the user, the control unit 308 of the wireless communication terminal 103
15 refers to an area for storing the information of alarm display for calling (step S601). Then a determination is made whether or not the information of alarm display for calling has been set up (step S602). As a result of determination, if the information of alarm display
20 for calling has been set up, an indication that the present charge rate per unit of time exceeds the acceptable charge price setting 75 that has been preset by the user and its present charge rate per unit of time are displayed on the display unit 312 of the
25 wireless communication terminal 103 (step S603).

 Next, in step S604, a determination is made whether or not an operation for calling is forcedly

performed by the user. As a result of this determination, if no operation for calling is forcedly performed for a predetermined time, a process of suspending calling is performed (step S605). Then this process ends. On the other hand, as a result of determination in step S602, if the information of alarm display for calling is not set (cleared), the operation for calling is continued (step S606). This process ends. As a result of determination in step S604, if the operation for calling is forced performed by the user, a process in step S606 is performed. Then this process ends. In step S602, even if the information of alarm display for calling is not set, the present charge rate per unit of time may be displayed.

According to the third embodiment of the invention, the wireless communication terminal 103 which is waiting in the wireless cells 100, 110 controlled by the wireless base stations 101, 111 reads and stores the present charge rate per unit of time which is notified by the informing signals 102, 112 that are sent out regularly from the wireless base stations 101, 111 (step S902), compares the present charge rate with the acceptable charge price setting 75 that has been preset by the user (step S903), sets up the information of alarm display for calling when the charge rate exceeds the acceptable charge price setting 75 (step S905), and displays an alarm for informing

that the acceptable charge rate is exceeded when an operation for calling by the user is accepted (step S603). Thereby, it is possible to prevent communication from being made beyond the acceptable charge rate that has been preset by the user. By accepting an operation for calling forcibly performed by the user who has disregarded an alarm display, it is possible to handle a user's request for immediateness rather than the communication fee. When the acceptable charge rate is exceeded, the present charge rate is displayed. Therefore, based on the present charge rate displayed, a determination can be made whether or not an operation for calling should be made. Also, even if the acceptable charge rate is not exceeded, the present charge rate may be displayed, so that the user can make a call by recognizing the charge rate at all times.

(Fourth embodiment)

Referring now to Fig. 11, explanation will be given below of a processing in which the wireless communication terminal 103 receives an individual communication information signal on an individual communication channel during communication in the wireless cell 100 controlled by the wireless base station 101. Fig. 11 is a flowchart showing a processing in which the wireless communication terminal 103 receives an individual communication information signal during communication according to a fourth

embodiment of the invention.

In Fig. 11, the wireless communication terminal 103 which is communicating in the wireless cell 100 controlled by the wireless base station 101 receives an individual communication information signal which has been sent out from the wireless base station 101 (step S1101). Then, the present charge rate per unit of time information which has been set in the information field 821 of charge rate per unit of time in the wireless cell which resides within the accompanying control information field 82 of the received individual information signal is read and stored in the RAM 306 (step S1102). Subsequently, a determination is made whether or not the present charge rate per unit of time exceeds the acceptable charge price setting 75 (acceptable charge rate) preset by the user and stored in the RAM 306 (step S1103). As a result of determination, if the charge rate does not go beyond the acceptable charge rate, a determination is made whether or not any operation for continuing communication is performed by the user (step S1105). As a result of this determination, if no operation for continuing communication is performed by the user, a determination is made whether or not a forced disconnection timer has been timed up (step S1107). As a result of this determination, if the forced disconnection timer has been timed up, a forced

disconnection process of communication line is initiated to disconnect the line. Then this process ends.

On the other hand, as a result of determination in
5 step S1103, if the acceptable charge price setting 75
is exceeded, an indication that the present charge rate
per unit of time exceeds the acceptable charge rate and
the present charge rate per unit of time are displayed
on the display unit 312 of the wireless communication
10 terminal 103. And the forced disconnection timer for
clocking the allowable time up to the forced
disconnection is started (step S1104). Then the
process following the step S1105 is performed. Also,
as a result of determination in the step S1105, if any
15 operation for continuing communication is performed by
the user, the forced disconnection timer that has
started at the step S1104 is stopped and cleared (step
S1106). The process following the step S1107 is
performed. This process ends.

20 According to the fourth embodiment of the
invention, the wireless communication terminal 103
which is communicating in the wireless cells 100, 110
controlled by the wireless base stations 101, 111 reads
and stores the present charge rate per unit of time
25 which is notified by an individual communication
information signal that is sent out during
communication (steps S1101, S1102), compares the

present charge rate with the acceptable charge price setting 75 that has been preset by the user (step S1103), effects an alarm display for informing the user that the acceptable charge rate is exceeded, when the
5 present charge rate exceeds the acceptable charge price setting 75 and starts the forced disconnection timer (step S1104). Further, a determination is made whether or not an operation for continuing communication is performed by the user (step S1105). Then if no
10 operation for continuing is performed and the forced disconnection timer has been timed up, the communication line is forcibly disconnected (step S1108). Thereby, it is possible to prevent communication from continuing for the long time beyond
15 the acceptable charge rate that has been preset by the user. By accepting an operation for continuing communication from the user who has disregarded an alarm display, it is possible to handle a user's request for the continuity of communication rather than
20 the communication fee. When the acceptable charge rate is exceeded during communication, the present charge rate is displayed. Therefore, based on the present charge rate displayed, a determination can be made whether or not the communication should be ended.
25 In the fourth embodiment as described above, only if the present charge rate exceeds the acceptable charge rate, the present charge rate is displayed.

However, the present charge rate may be displayed at all times. Also, when the user issues an instruction from the operation unit (not shown) during communication, the present charge rate stored in the
5 RAM 306 in step S1102 may be read and displayed.

In this way, even if this acceptable charge rate is not exceeded during communication, the user can recognize the present charge rate.

(Fifth embodiment)

10 A wireless communication system according to a fifth embodiment of the invention will be described below with reference to Figs. 12 and 13.

This wireless communication system is supposed to improve a terminal gain by means of transmission
15 diversity, and uses a mobile communication system of a wideband CDMA (W-CDMA) which is a candidate for the IMT2000 (International Mobile Telecommunication 2000) system. Fig. 12 is a systematic configuration view showing the whole of the wireless communication system
20 according to the fifth embodiment of the invention.

In Fig. 12, a communication cell 1200 controls a service wireless base station 1203 for administrating the assignment of a main wireless channel, and the drift wireless base stations 1204, 1205 for
25 administrating the assignment of a subsidiary wireless channel. When a wireless communication terminal 1206 makes communication within the communication cell, a

channel is assigned to a plurality of base stations,
whereby a diversity gain can be obtained without
increasing the number of antennas for the wireless
communication terminal which is strongly demanded to be
5 in small size.

The service wireless base station 1203 is
connected via a service wireless network controller
1201 to a core network 120 of a communication service
provider.

10 The drift wireless base stations 1204, 1205 are
connected via a drift wireless network controller 1202
to the service wireless network controller 1201. The
core network 120 is connected via a communication
gateway 123 to an external communication network 122,
15 as well as to a charge control center 121 for managing
the charging of the wireless communication terminal
1206.

Regarding the relation between the service
wireless base station 1203 and the service wireless
20 network controller 1201, and the relation between the
drift wireless base stations 1204, 1205 and the drift
wireless network controller 1202, the wireless base
station with which the wireless communication terminal
1206 has requested a wireless line connection becomes a
25 service wireless base station 1203, and the wireless
network controller for controlling the service wireless
base station becomes a service wireless network

controller 1201.

In this embodiment as illustrated, the service wireless base station 1203 and the drift wireless base stations 1204, 1205 are accommodated within different network controllers. However, there may be some cases where they are accommodated within the same wireless network controller, or where all the wireless base stations involved in the transmission diversity are accommodated within different wireless network controllers.

Fig. 13 is a block diagram showing an internal configuration of the wireless network controllers 1201, 1202 of Fig. 12. In Fig. 13, a wireless network controller is configured by a wired communication unit to core network 1301 for making communication with the core network, an encode/decode unit to core network 1302 for encoding and decoding the data, which is connected to the core network wired communication unit 1301, a wired communication unit to wireless network 1303 for making communication with the other wireless network controller, an encode/decode unit to wireless network 1304 for encoding and decoding the data, which is connected to the wireless network wired communication unit 1303, a wired communication unit to wireless base station 1305 for making communication with the wireless base station, an encode/decode unit to wireless base station 1306 for encoding and decoding

the data, which is connected to the wireless base station wired communication unit 1305, an exchange switch 1308 for administering the exchange of information, which is connected to each of the data
5 encode/decode units, a wireless resource management unit for each wireless base station 1311 for managing the information of wireless resource for each wireless base station connected thereto, a RAM 1310 for storing temporarily various kinds of information, a ROM 1311
10 for storing a control program, and a control unit 1309 for controlling each unit in accordance with the control program.

The wireless communication terminal is the same as shown in Fig. 2, and the wireless base station is the
15 same as shown in Fig. 3.

An informing signal which is sent out from the wireless base stations 1203, 1204 and 1205 is in the same format as shown in Fig. 4.

Referring now to Figs. 14 to 16, explanation will
20 be given below of a processing in which the wireless network controllers 1201, 1202 change the charge rate per unit of time depending on the remaining amount of wireless resources available to each wireless base station controlled by the wireless network controllers
25 1201, 1202, and notifies the charge rate to the wireless communication terminal which is waiting. Fig. 14 is a view showing the relation between the charge rate per

unit of time in each wireless base station 1203, 1204, 1205 and the remaining amount of wireless resources available to each wireless base station which is controlled by the wireless network controller according to the fifth embodiment of the invention.

In Fig. 14, the charge rate per unit of time is indicated along the axis of ordinate, and the remaining amount of wireless resources available to the wireless base station (amount of individual physical channels available) along the axis of abscissa. In this embodiment, the remaining amount of wireless resources for each wireless base station is cited as the parameter for changing the charge rate per unit of time, but the communication traffic volume for each wireless base station may be also applied.

In Fig. 14, the charge rate down thresholds 142, 144 are charge rate change thresholds for reducing the charge rate per unit of time, when the number of wireless communication terminals 1206 decreases (or the remaining amount of wireless resources for each wireless base station increases) which are connected wireless to the wireless base station. The charge rate up thresholds 141, 143 are charge rate change thresholds for raising the charge rate per unit of time, when the number of wireless communication terminals 1206 increases (or the remaining amount of wireless resources for each wireless base station

decreases) which are connected wireless to the wireless base station. An acceptable charge price setting 145 is an acceptable charge rate that can be preset by the user. A price range of alarm display indicates a range of charge rate going beyond the acceptable charge price setting 145, and an acceptable price range for calling indicates a range of charge rate falling below the acceptable charge price setting 145. Also in this embodiment, the charge rate is changed in accordance with the charge rate change threshold having a hysteresis characteristic.

Fig. 15 is a flowchart showing a processing in which the wireless network controllers 1201, 1202 in the wireless communication system change the present charge rate per unit of time and notifies it to the core network 120, and the wireless base stations 1203, 1204, and 1205 according to the fifth embodiment of the invention. In Fig. 15, a control unit 1309 of the wireless network controller investigates the remaining amount of wireless resources in each controlled wireless base station (step S1501). Then, a comparison is made between the remaining amount of wireless resources in each wireless base station which is investigated and stored by the wireless resource management unit for each wireless base station 1307 of Fig. 13 and the thresholds of changing the charge rate which are stored in the RAM 1310 (step S1502). A

determination is made whether or not the remaining amount of wireless resources in each wireless base station exceeds the thresholds 142, 144 of reducing the charge rate (step S1503). As a result of this
5 determination, if the remaining amount of wireless resources in each wireless cell does not exceed the thresholds 142, 144 of reducing the charge rate, the operation proceeds to a next step (step S1505).

Next, a determination is made whether or not the
10 remaining amount of wireless resources in each wireless base station is below the thresholds 141, 143 of raising the charge rate (step S1505). As a result of determination, if it is not below the thresholds 141, 143 of raising the charge rate, this process ends. As
15 a result, the charge rate is not changed. In each wireless base station, the same charge rate is continuously used.

On the other hand, as a result of determination in step S1503, if the remaining amount of wireless
20 resources in a wireless base station is above the thresholds 142, 144 of reducing the charge rate, the charge rate per unit of time in that wireless base station is reduced (step S1504). The present charge rate per unit of time is notified to the core network
25 120, the charge control center 121 and the wireless base station (step S1507). Then this process ends.

As a result of determination in step S1505, if the

remaining amount of wireless resources in a wireless base station is below the thresholds 142, 144 for increasing the charge rate, the charge rate per unit of time in that wireless base station is reduced (step S1506). The present charge rate per unit of time is notified to the core network 120, the charge control center 121 and the wireless base station (step S1507). Then this process ends.

Fig. 16 is a flowchart showing a process for changing the charge rate per unit of time within an information element of an informing signal which is transmitted regularly by the wireless base stations 1203, 1204 and 1205 of the wireless communication system according to the fifth embodiment of the invention. A determination is made whether or not there is a request of changing the charge rate per unit of time transmitted by the wireless network controllers 1201, 1202 (step S1601). If there is no request, this processing is directly ended. As a result, the charge rate per unit of time on the informing signal is not changed, and the transmission of the informing signal is continued at the same charge rate.

On the other hand, if there is a request, the charge rate per unit of time that is transmitted by the informing signal is changed in accordance with the request (step S1602). A completion of change of the charge rate per unit of time is notified to the

wireless network controller (step S1603). Thereafter,
this process ends. As a result, the charge rate per
unit of time set up by the wireless network controller
can be reflected to the charge rate information per
5 unit of time on the informing signal in the wireless
base station.

According to the fifth embodiment of the
invention, the changed charge rate is notified to the
wireless communication terminal which is waiting,
10 without effecting wireless line connection.
Accordingly, the wireless resources in each wireless
base station can be effectively utilized, and the user
of the wireless communication terminal can grasp the
communication fee (charge rate) before making line
15 connection, to effect communication within the limit of
budgetary appropriation of the user.

Also, the charge rate is changed based on the
thresholds having a hysteresis characteristic.
Thereby, it is possible to suppress the charge rate
20 from being changed too frequently.

(Sixth embodiment)

Referring now to Figs. 17 to 20, explanation will
be given below of a processing in which the wireless
communication terminal 1206 makes a call connection in
25 the wireless communication system (as shown in Fig. 12)
according to a sixth embodiment of the invention.

Fig. 17 is a control sequence conceptual diagram

in which the wireless communication terminal makes a call connection with a plurality of wireless base stations by setting up the wireless line. Fig. 18 is a control sequence conceptual diagram in which the

5 wireless communication terminal tried to make a call connection with a plurality of wireless base stations by setting up the wireless line, but makes a call connection only with the service wireless base station by setting up the wireless line because no agreement

10 has not been reached in respect of the acceptable charge price with the drift wireless base stations that are communicable. Fig. 19 is a control concept flowchart of the service wireless network controller 1201 in this embodiment. Fig. 20 is a control concept

15 flowchart of the drift wireless network controller 1202 in this embodiment.

A wireless communication terminal 1206, which has accepted a notification of incoming call to the wireless communication terminal or an operation for

20 calling by the user, transmits a connection request message (1701, 1801) for call connection to the wireless base station (hereinafter referred to as a service wireless base station) which judges that the wireless connection is possible at its own acceptable

25 charge rate in the processing of the fifth embodiment.

As the information parameter of this connection request message, the set acceptable charge price of the

wireless communication terminal is notified.

The service wireless base station which has received the connection request message transfers a connection request message to the wireless network controller. The wireless network controller (hereinafter referred to as a service wireless network controller) which has received the connection request message via the service wireless base station reads the set acceptable charge price of the wireless communication terminal from this received message (step S1901), and initiates a process (steps S1702 to S1704, S1802 to S1804) of establishing the individual wireless channel (step S1902). After completion of the process of establishing the individual wireless channel, the service wireless network controller transmits an additional wireless link establishment request message to make a request for establishing an additional individual wireless channel to the wireless network controller (hereinafter referred to as a drift wireless network controller) which controls the wireless base station (hereinafter referred to as a drift wireless base station) which exists in close vicinity to the service wireless base station and at the position where the wireless link with the wireless communication station can be established (steps S1705, S1805, S1903).

As the information parameters for this additional wireless link establishment request message, the set

acceptable charge price of the wireless communication terminal and the identification information of the wireless base station to be designated as the drift wireless base station are notified.

5 The drift wireless network controller which has accepted an additional wireless link establishment request message reads the identification information of the wireless base station designated as the drift wireless base station and the acceptable charge price
10 of the wireless communication terminal for effecting communication this time (step S2001). A comparison is made between the present charge rate of the designated drift wireless base station and the acceptable charge price of the wireless communication terminal (step
15 S2002). If the present charge rate is equal to or less than the acceptable charge price of the wireless communication terminal, an additional wireless link establishment response message (1708) is returned to the service wireless network controller (step S2003).
20 And a process of establishing the additional individual wireless channel (1706 to 1709) is performed (step S2005).

 If the present charge rate of a wireless base station designated as drift wireless base station
25 exceeds the acceptable charge price of the wireless communication terminal, an additional wireless link establishment request reject message (1806) is returned

to the service wireless network controller (step S2004).

If the service wireless network controller receives the additional wireless link establishment response message (1708) in step S1904, a process of establishing the additional individual wireless channel (1706 to 1710) is performed (step S1905). Thereafter, a connection setting message (1711) is transmitted to the wireless communication terminal. After confirming the reception of a connection setting confirmation message (1712) as a response from the wireless communication terminal, a call setting process (1713) is performed. The call connection is made in a state where the wireless link is established with the plurality of wireless base stations (step S1907).

Also, in the case where the additional wireless network request reject message (1806) is received (step S1906), or a timer for gracing the start of call setting has timed out without response from the drift wireless network controller (step S1908), a connection setting message (1807) is transmitted to the wireless communication terminal. After confirming the reception of a connection setting confirmation message (1808) as a response from the wireless communication terminal, a call setting process (1809) is performed. The call connection is made in a state where the wireless link is established with a single wireless base station

(service base station) (step S1907).

According to the sixth embodiment of the invention, it is possible to effect communication (wireless line connection) having communication quality
5 (with or without transmission diversity) within the limit of budgetary appropriation of the user in making a call connection.

In this embodiment, the service wireless network controller and the drift wireless network controller
10 are physically independent. However, in the case where the drift wireless base station is accommodated within the service wireless network controller, the process of the service wireless network controller and the process of the drift wireless network controller are performed
15 within a single wireless network controller. Consequently, the same effects can be provided as shown in this embodiment.

(Seventh embodiment)

Referring now to Figs. 7, 14, 21 and 22,
20 explanation will be given below of a processing in which the service wireless network controller 1201 changes the charge rate in accordance with the remaining amount of wireless resources for the wireless base station to be used for communication and notifies
25 it to the wireless communication terminal 1206 which is communicating in the wireless communication system according to a seventh embodiment of the invention.

Fig. 21 is a flowchart showing a processing in which the service wireless network controller 1201 changes the charge rate per unit of time and make a notification of the charge rate to the core network 120 and the wireless base stations 1203 to 1205. Fig. 22 is a flowchart showing a processing in which the wireless base stations set the charge rate to the accompanying control area of the individual communication information signal in accordance with the notification.

In Fig. 21, the service wireless network controller investigates the remaining amount of wireless resources in each controlled wireless base station (step S2101). Then a comparison is made between the remaining amount of wireless resources in a wireless base station with the smallest remaining amount among the remaining amounts of wireless resources for the wireless base stations (including the remaining amount of wireless resources for the drift wireless base station) which are investigated and stored by the wireless resource management unit 1307 for each wireless base station of Fig. 13 and the change thresholds of the charge rate (step S2102). A determination is made whether or not the smallest remaining amount of wireless resources in the wireless base stations exceeds the thresholds 142, 144 for reducing the charge rate (step S2103). As a result of

this determination, if the remaining amounts of wireless resources for the wireless base stations do not go beyond the thresholds 142, 144 for reducing the charge rate, the operation proceeds to the next step S2105.

Next, a determination is made whether or not the remaining amount of wireless resources in the wireless base stations is below the thresholds 141, 143 for raising the charge rate (step S2105). As a result, if it does not fall below the thresholds 141, 143 for raising the charge rate, this process ends. Consequently, the charge rate is not changed, and the same charge rate is continuously used.

On the other hand, as a result of comparison in step S2103, if the remaining amount of wireless resources in the wireless base stations exceeds the thresholds 142, 144 for reducing the charge rate, the charge rate per unit of time is reduced (step S2104). And the present charge rate per unit of time is notified to the core network 120, the charge control center 121 and the wireless base station of interest (step S2107). Then this process ends.

As a result of comparison in step S2205, if the remaining amount of wireless resources in the wireless base stations goes below the thresholds 141, 142 for increasing the charge rate, the charge rate per unit of time is increased (step S2106). And the present charge

rate per unit of time is notified to the core network 120, the charge control center 121 and the wireless base station of interest (step S2107). Then this process ends.

5 Fig. 22 is a flowchart showing a process for changing the charge rate per unit of time within the accompanying control signal information element which is transmitted by the wireless base stations 1203, 1204 and 1205 in the wireless communication system according to the seventh embodiment of the invention. First, a
10 determination is made whether or not there is a request of changing the charge rate transferred from the service wireless network controller 1201 (step S2201). If there is no request, this process ends. As a
15 result, the charge rate per unit of time on the accompanying control signal is not changed, and the transmission of accompanying control signal is continued at the same charge rate.

 On the other hand, if there is a request, the
20 charge rate per unit of time transmitted by the accompanying control signal is changed in accordance with the request (step S2202). Then the completion of change is notified to the service wireless network controller (step S2203). Thereafter, this process
25 ends. As a result, the charge rate per unit of time which has been set by the service wireless network controller can be reflected onto the charge rate

information per unit of time on the individual communication information signal of the wireless base station.

According to the seventh embodiment of the invention, the changed charge rate is notified to the wireless communication terminal which is communicating without interrupting the communication. Thereby, it is possible to make effective use of the wireless resources for each wireless base station. Further the user of the wireless communication terminal can grasp the communication fee (charge rate) in real time before the line connection and effect communication within the limit of budgetary appropriation of the user.

In the above-described fifth to seventh embodiments of the invention, the wireless network controller determines the charge rate of the controlled wireless base station. However, each wireless base station may determine the charge rate. In this case, the wireless base station may notify the determined charge rate to the wireless network controller, and the wireless network controller may manage the charge rate notified from each wireless base station. Thereby the same processing as above can be performed.

(Other embodiments)

In the above-described embodiments, a wideband CDMA (W-CDMA) mobile communication system which is a wireless communication system based on the micro cell,

and a candidate for the IMT 2000 (International Mobile Telecommunication 2000) system has been described. The present invention is also applicable to other wireless communication terminals operating under the wireless communication systems (e.g., a narrow band CMDA mobile communication system PHS, PDC, GSM, etc.) based on the micro cell.

As described above, with this invention, since the charge rate is changed with reference to the thresholds having a hysteresis characteristic, it is possible to suppress the variation of the charge rate.

For a wireless communication unit which is waiting, the charge rate can be notified without using a special signal or procedure for notification of the charge rate, because the charge rate can be notified to the wireless communication unit using an informing signal.

Also for a wireless communication unit which is communicating, the charge rate can be notified without interrupting the communication and using any special signal and procedure, because the charge rate can be notified using a communication information signal that is transmitted from the wireless control device to the wireless communication unit.

A wireless communication unit can be connected to the wireless control device in accordance with a charge rate notified by the wireless communication unit.

Also in a system in which the charge rate is changed dynamically, it is possible to provide a wireless communication unit which is easy to use.

WHAT IS CLAIMED IS:

1. A wireless communication system having a wireless controller for controlling a wireless communication unit, comprising:

5 determination means for determining a situation within a wireless cell controlled by said wireless controller;

10 memory means for storing a threshold for changing a charge rate for communication within said wireless cell, the threshold having a hysteresis characteristic; and

15 decision means for deciding the charge rate for communication within said wireless cell, based on the situation determined by said determination means and the threshold having the hysteresis characteristic stored in said memory means.

20 2. The wireless communication system according to claim 1, wherein said determination means determines the remaining amount of wireless resources within said wireless cell.

25 3. The wireless communication system according to claim 1, wherein said determination means determines the traffic volume within said wireless cell.

4. The wireless communication system according

to claim 1, further comprising transmission means for
transmitting the charge rate decided by said decision
means using an informing signal which said wireless
controller transmits regularly to said wireless
5 communication unit.

5. The wireless communication system according
to claim 1, further comprising transmission means for
transmitting the charge rate decided by said decision
10 means using a communication information signal
transmitted from said wireless controller to said
wireless communication unit while said wireless
communication unit is communicating via said wireless
controller.

15 6. The wireless communication system according
to claim 5, wherein said transmission means transmits
said charge rate added to an accompanying control
information which is included within said communication
20 information signal.

7. The wireless communication system according
to claim 1, wherein said decision means has a
management unit for managing a plurality of wireless
25 controllers.

8. A wireless communication system having a

wireless controller for controlling a wireless communication unit, comprising:

5 determination means for determining a situation within a wireless cell controlled by said wireless controller;

memory means for storing a threshold for changing a charge rate for communication within said wireless cell; and

10 transmission means for transmitting the charge rate based on the situation determined by said determination means and the threshold stored in said memory means using an informing signal which said wireless controller transmits regularly to said wireless communication unit.

15

9. A wireless communication system having a wireless controller for controlling a wireless communication unit, comprising:

20 determination means for determining a situation within a wireless cell controlled by said wireless controller;

memory means for storing a threshold for changing a charge rate for communication within said wireless cell; and

25 transmission means for transmitting the charge rate based on the situation determined by said determination means and the threshold stored in said

memory means using a communication information signal transmitted from said wireless controller to said wireless communication unit, while said wireless communication unit is communicating via said wireless controller.

10. The wireless communication system according to claim 9, wherein said transmission means transmits said charge rate added to an accompanying control information which is included within said communication information signal.

11. A wireless communication system having a plurality of wireless controllers for controlling wireless communication units, comprising:

identification means for identifying a charge rate for communication within each wireless cell controlled by the plurality of wireless controllers;

decision means for deciding a wireless controller to be connected to said wireless communication unit based on the charge rate notified by said wireless communication unit and the charge rate identified by said identification means; and

control means for controlling to connect the wireless controller decided by said decision means and said wireless communication unit.

12. The wireless communication system according to claim 11, wherein said decision means can decide one or more wire controllers to be connected to said wireless communication unit.

5

13. The wireless communication system according to claim 11, wherein said identification means identifies the charge rate based on a situation within said wireless cell.

10

14. A wireless communication unit for making communication in accordance with a charge rate notified by a wireless controller, comprising:

memory means for storing the charge rate at which the communication is permitted;

reception means for receiving from said wireless controller information regarding the charge rate for communication within a wireless cell controlled by said wireless controller; and

display means for providing display based on the charge rate stored in said memory means and the charge rate received by said reception means.

15. The wireless communication unit according to claim 14, wherein said display means provides said display when the charge rate received by said reception means exceeds the charge rate stored in said memory means.

16. The wireless communication unit according to claim 15, wherein said display means displays an indication that the charge rate received by said reception means exceeds the charge rate stored in said memory means, and the information regarding the charge rate received by said reception means.

17. The wireless communication unit according to claim 14, wherein the communication of said wireless communication unit is inhibited when the charge rate received by said reception means exceeds the charge rate stored in said memory means.

18. The wireless communication unit according to claim 17, wherein the communication is compulsorily enabled by performing a predetermined operation of said wireless communication unit even when said communication is inhibited.

19. The wireless communication unit according to claim 14, wherein said reception means receives the charge rate using an informing signal which said wireless controller transmits regularly to said wireless communication unit.

20. The wireless communication unit according to claim 14, wherein said reception means receives the

charge rate using a communication information signal transmitted from said wireless controller to said wireless communication unit while said wireless communication unit is communicating via said wireless controller.

21. The wireless communication unit according to claim 20, wherein said reception means receives said charge rate added to an accompanying control information included in said communication information signal.

22. The wireless communication unit according to claim 14, wherein the charge rate received by said reception means is based on a situation within the wireless cell controlled by said wireless controller.

23. A method for controlling a wireless communication system having a wireless controller for controlling a wireless communication unit, comprising:

a determination step of determining a situation within a wireless cell controlled by said wireless controller;

a storage step of storing a threshold for changing a charge rate for communication within said wireless cell, the threshold having a hysteresis characteristic; and

a decision step of deciding the charge rate for communication within said wireless cell, based on the situation determined in said determination step and the threshold having the hysteresis characteristic stored
5 in said storage step.

24. A method for controlling a wireless communication system having a wireless controller for controlling a wireless communication unit, comprising:
10 a determination step of determining a situation within a wireless cell controlled by said wireless controller;
a storage step of storing a threshold for changing a charge rate for communication within said wireless
15 cell; and
a transmission step of transmitting the charge rate based on the situation determined in said determination step and the threshold stored in said storage step using an informing signal which said
20 wireless controller transmits regularly to said wireless communication unit.

25. A method for controlling a wireless communication system having a wireless controller for
25 controlling a wireless communication unit, comprising:
a determination step of determining a situation within a wireless cell controlled by said wireless

controller;

a storage step of storing a threshold for changing a charge rate for communication within said wireless cell; and

5 a transmission step of transmitting the charge rate based on the situation determined in said determination step and the threshold stored in said storage step using a communication information signal transmitted from said wireless controller to said
10 wireless communication unit while said wireless communication unit is communicating via said wireless controller.

26. A method for controlling a wireless
15 communication system having a plurality of wireless controllers for controlling the wireless communication units, comprising:

a identification step of identifying the charge rate for communication within each wireless cell
20 controlled by the plurality of wireless controllers;

a decision step of deciding a wireless controller to be connected to said wireless communication unit based on the charge rate notified by said wireless communication unit and the charge rate identified in
25 said identification step; and

a control step of controlling to connect the wireless controller decided in said decision step and

said wireless communication unit.

27. A method for controlling a wireless
communication unit for making communication in
5 accordance with a charge rate notified by a wireless
controller, comprising:

a storage step of storing a charge rate at which
the communication is permitted;

10 a reception step of receiving from said wireless
controller information regarding the charge rate for
communication within a wireless cell controlled by said
wireless controller; and

15 a display step of providing display based on the
charge rate stored in said storage step and the charge
rate received in said reception step.

ABSTRACT OF THE DISCLOSURE

The invention aims at providing a method of notifying a charge rate from a wireless controller to a wireless communication unit when the charge rate is changed dynamically.

According to the invention, there is provided a wireless communication system having a wireless controller for controlling a wireless communication unit. The wireless communication system is composed of determination means for determining a situation within a wireless cell controlled by the wireless controller, memory means for storing a threshold for changing the charge rate for communication within the wireless cell, the threshold having a hysteresis characteristic, and decision means for deciding the charge rate for communication within the wireless cell based on the situation determined by the determination means and the threshold having the hysteresis characteristic stored in the memory means.

FIG. 1

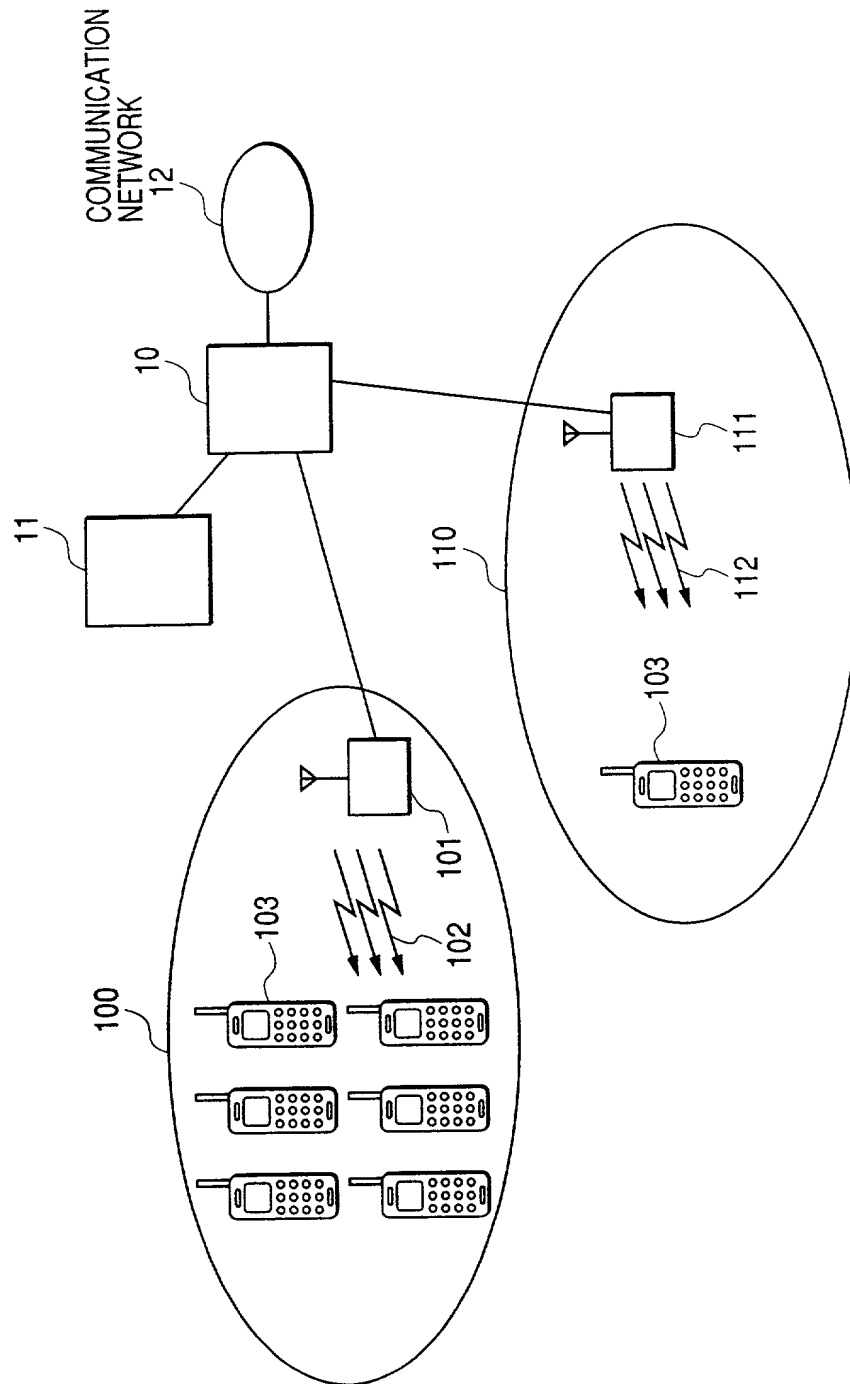


FIG. 2

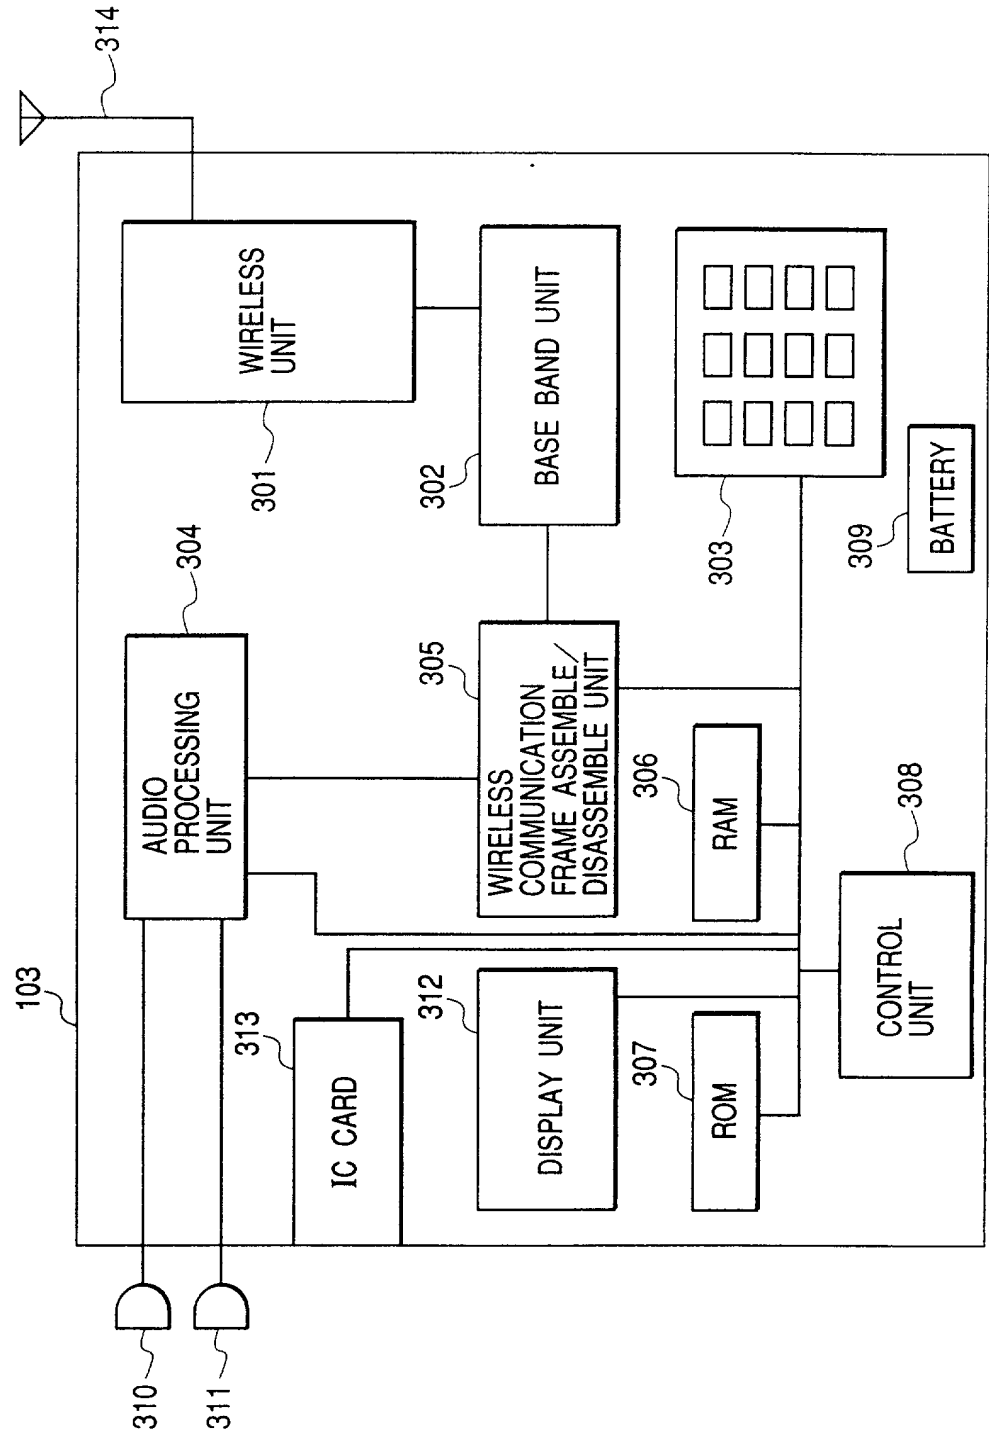


FIG. 3

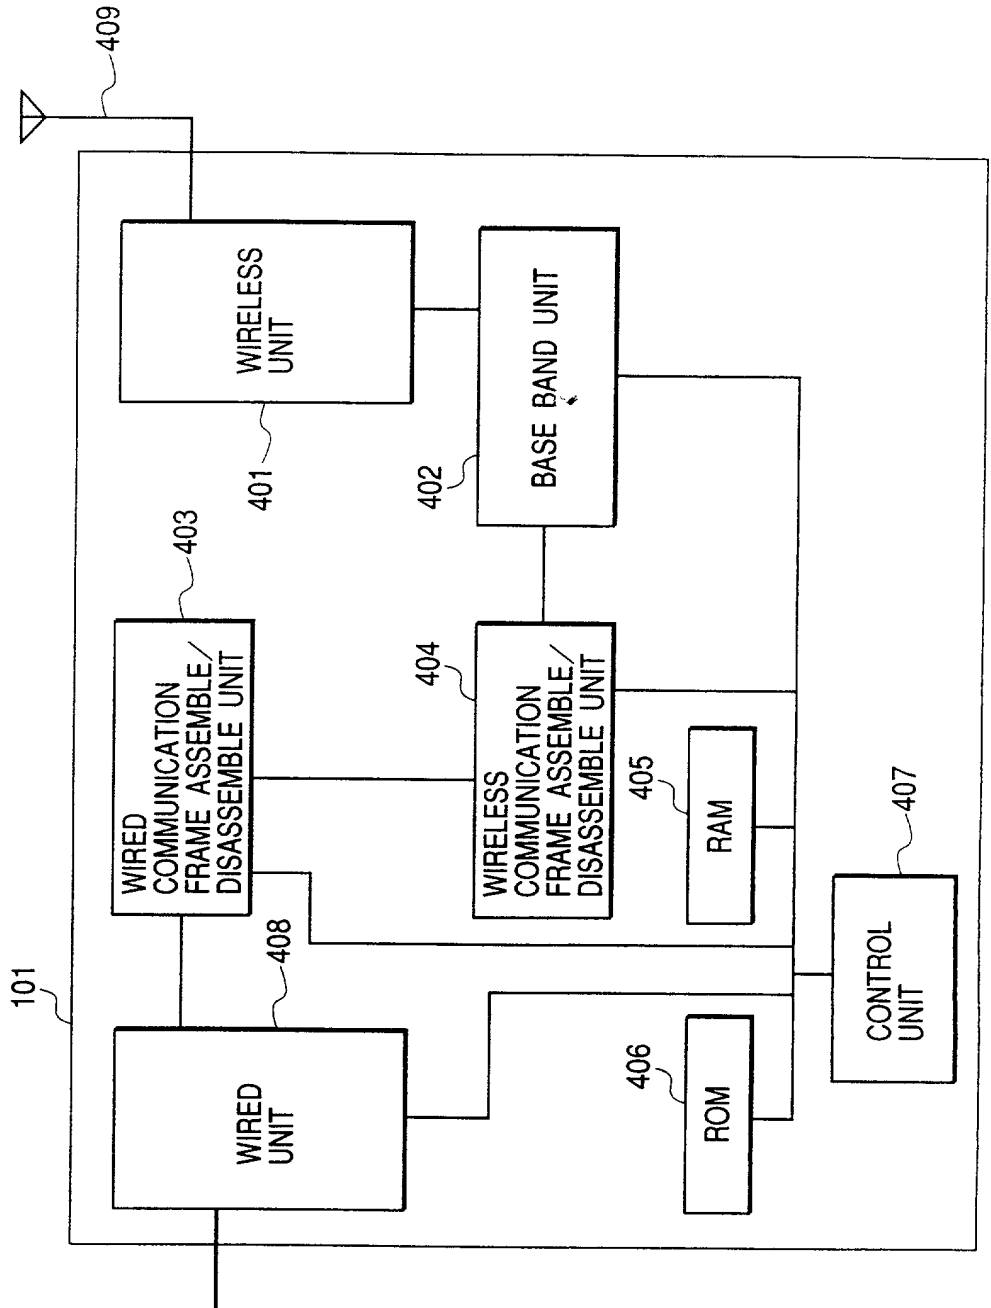


FIG. 4

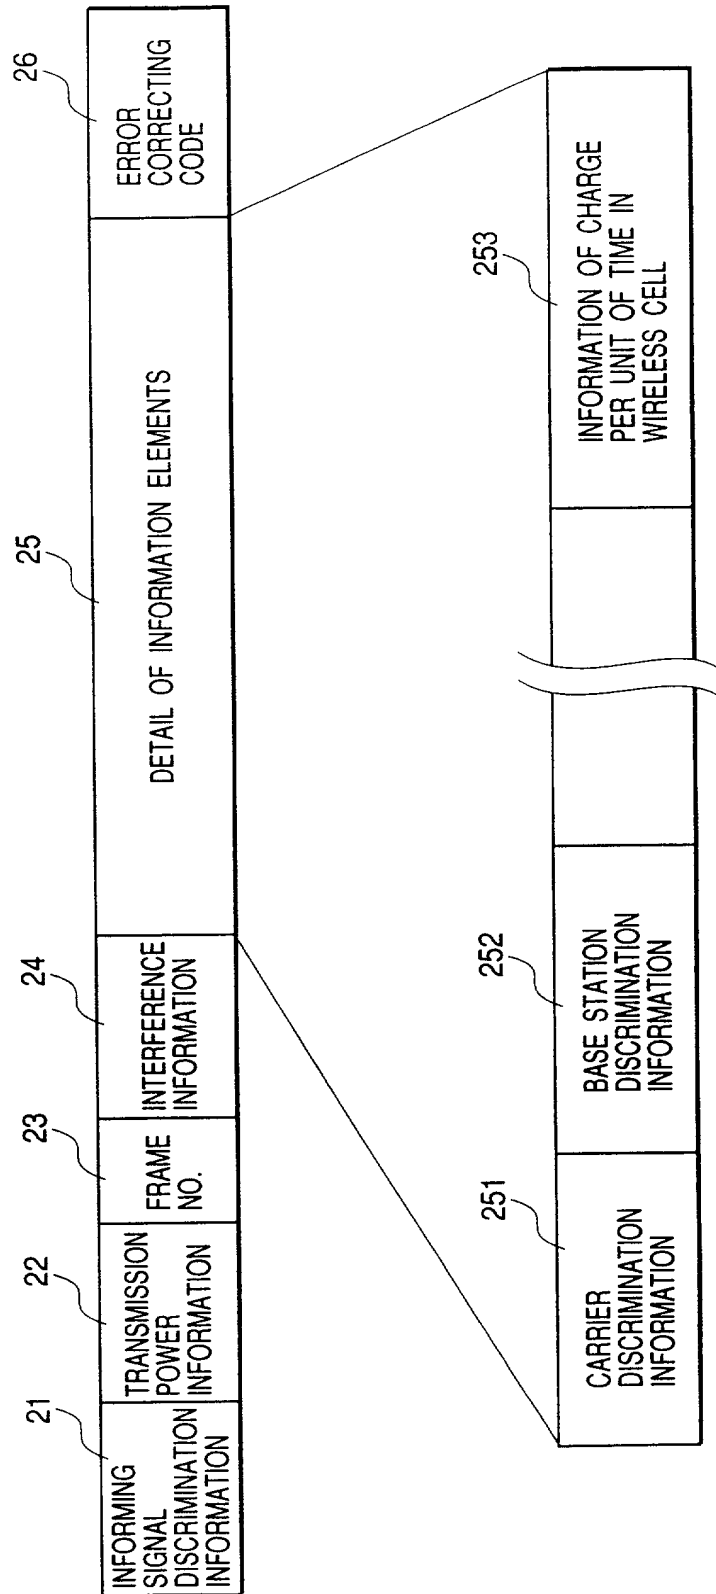


FIG. 5

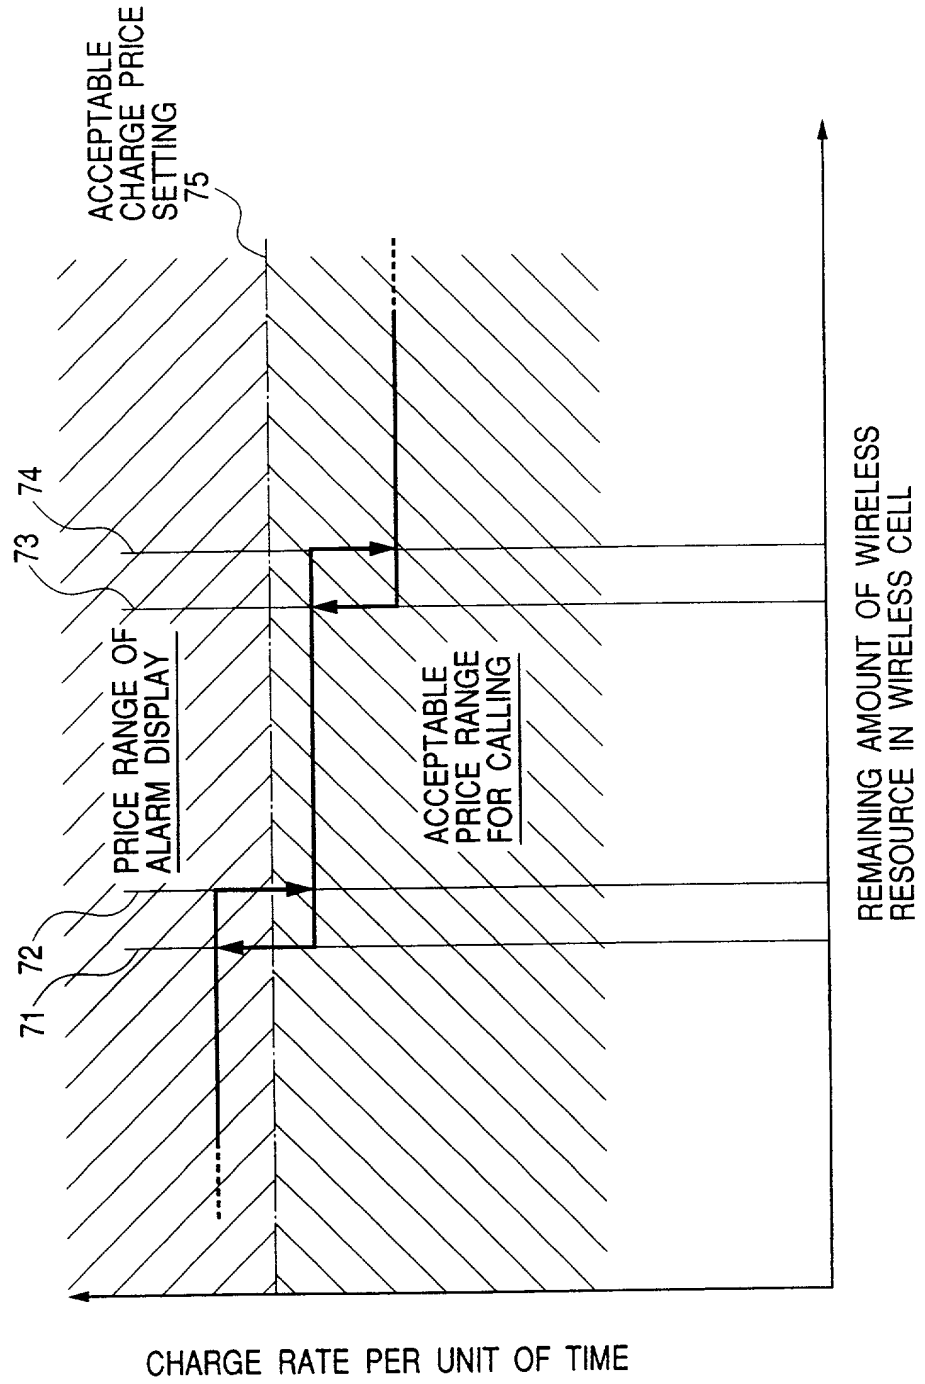


FIG. 6

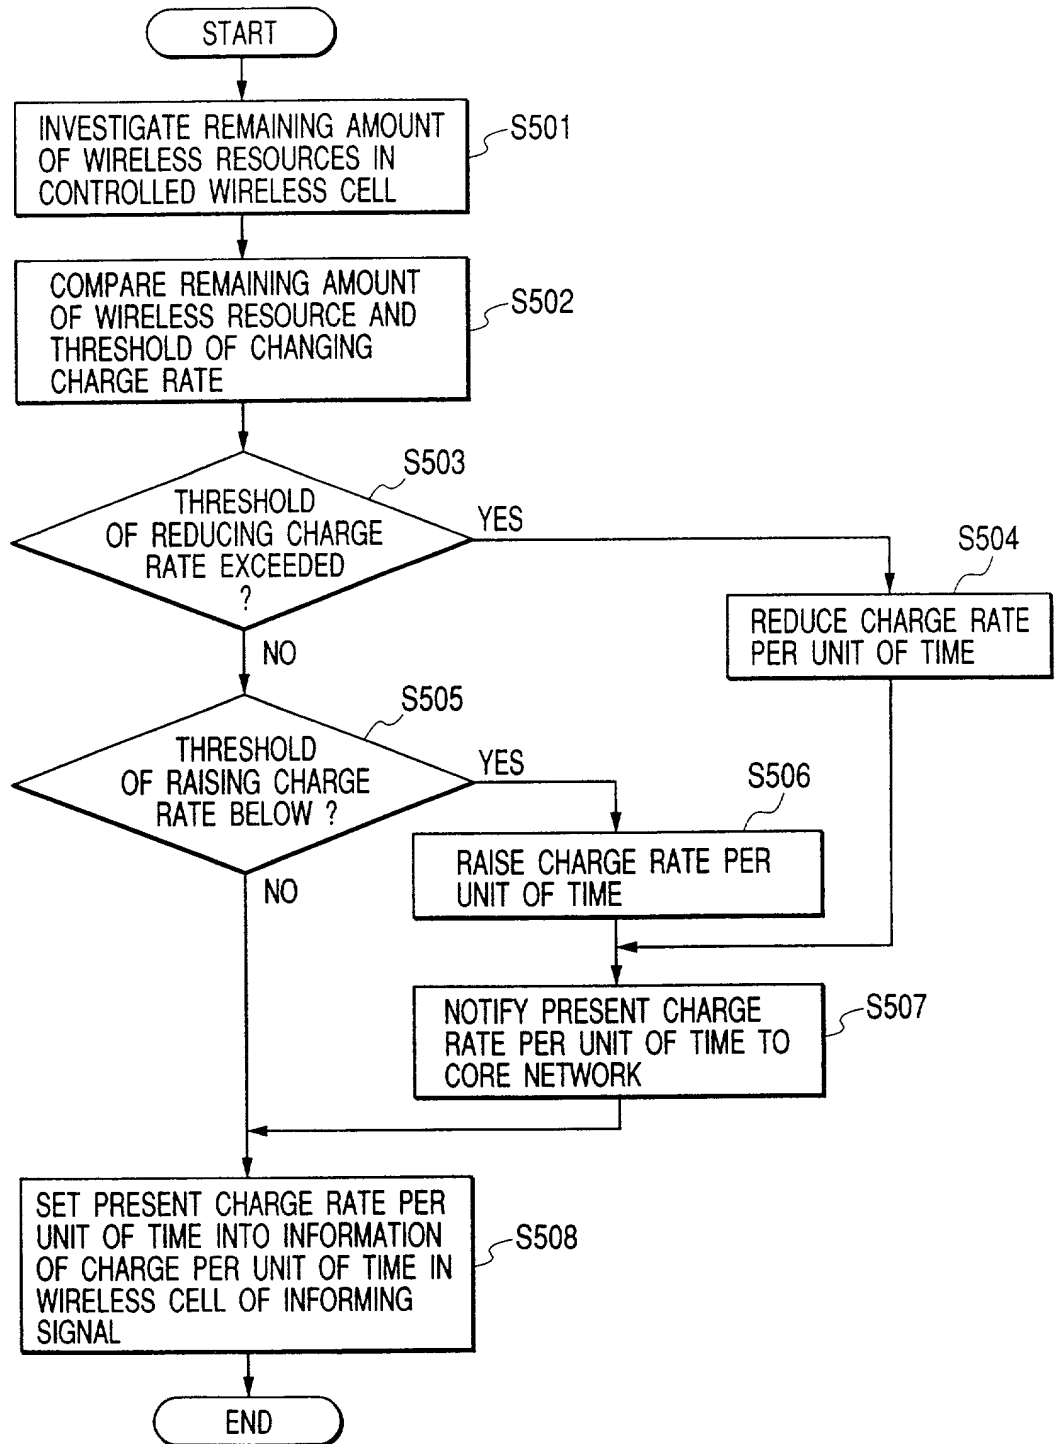


FIG. 7

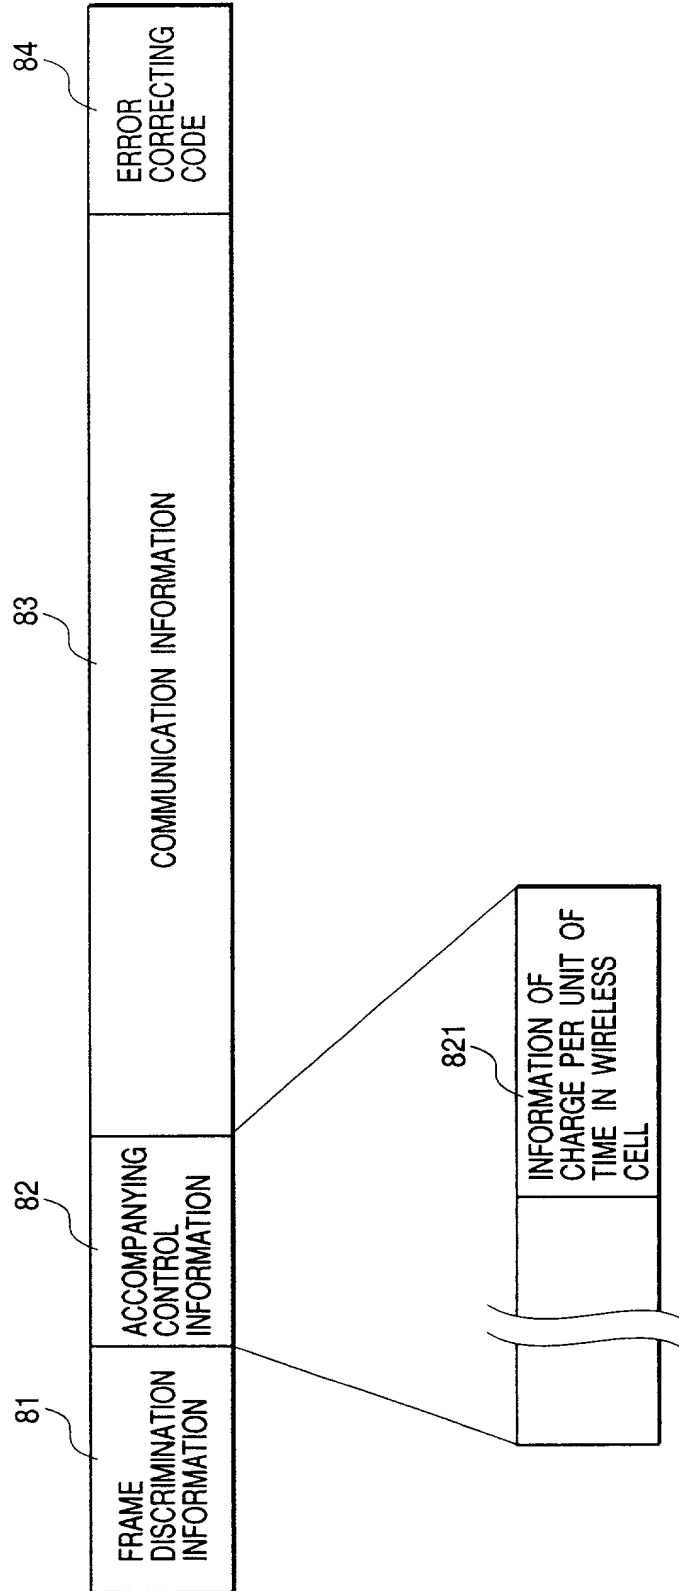


FIG. 8

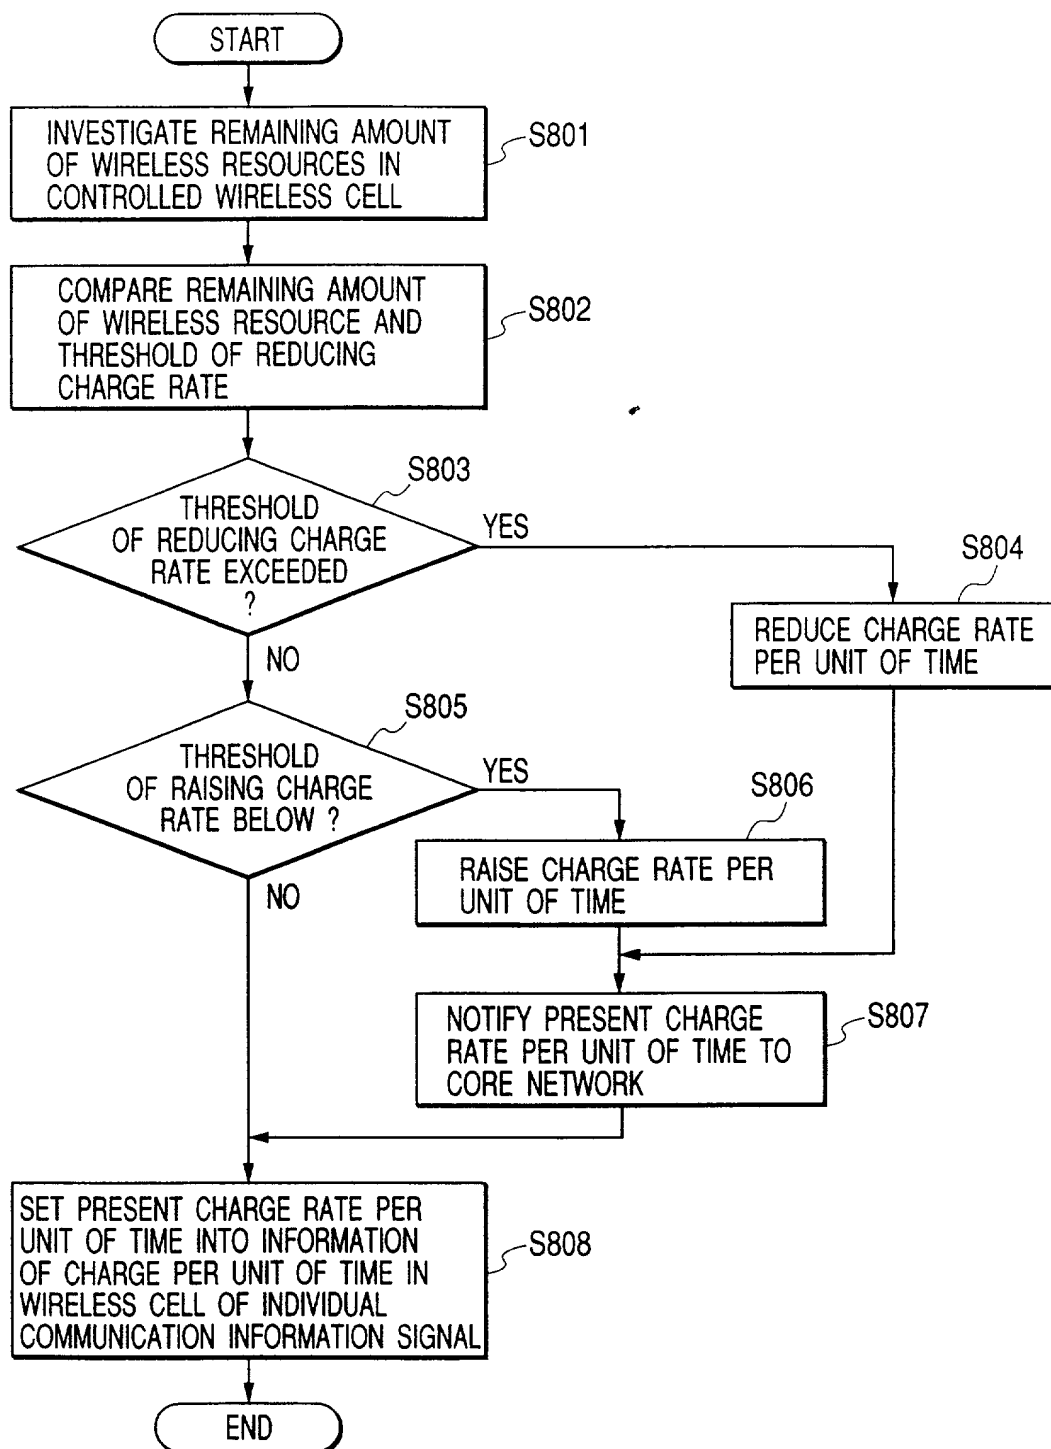


FIG. 9

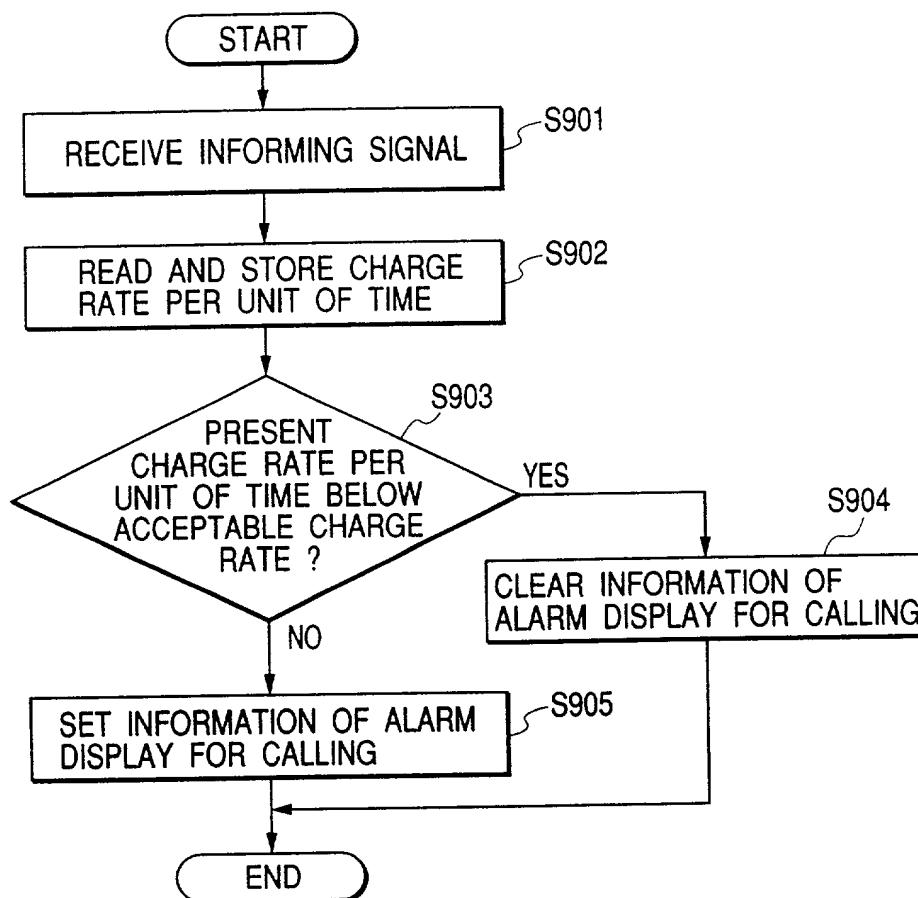


FIG. 10


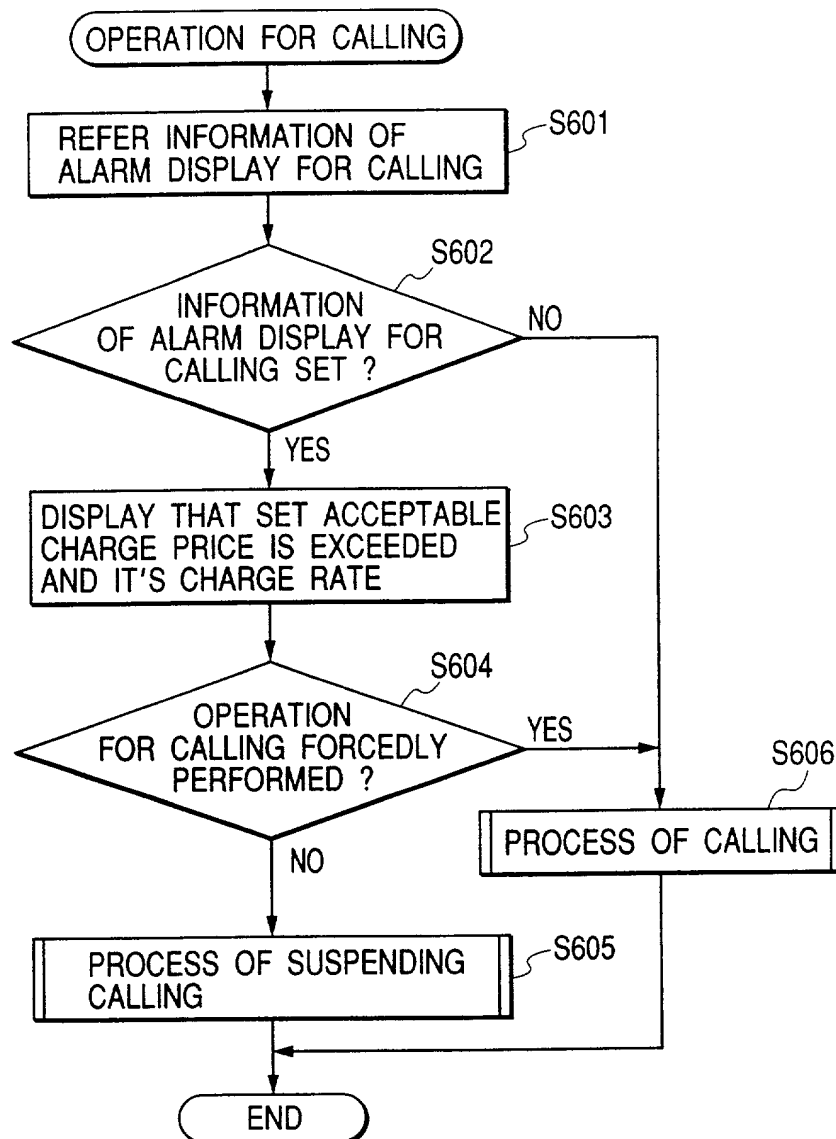


FIG. 11

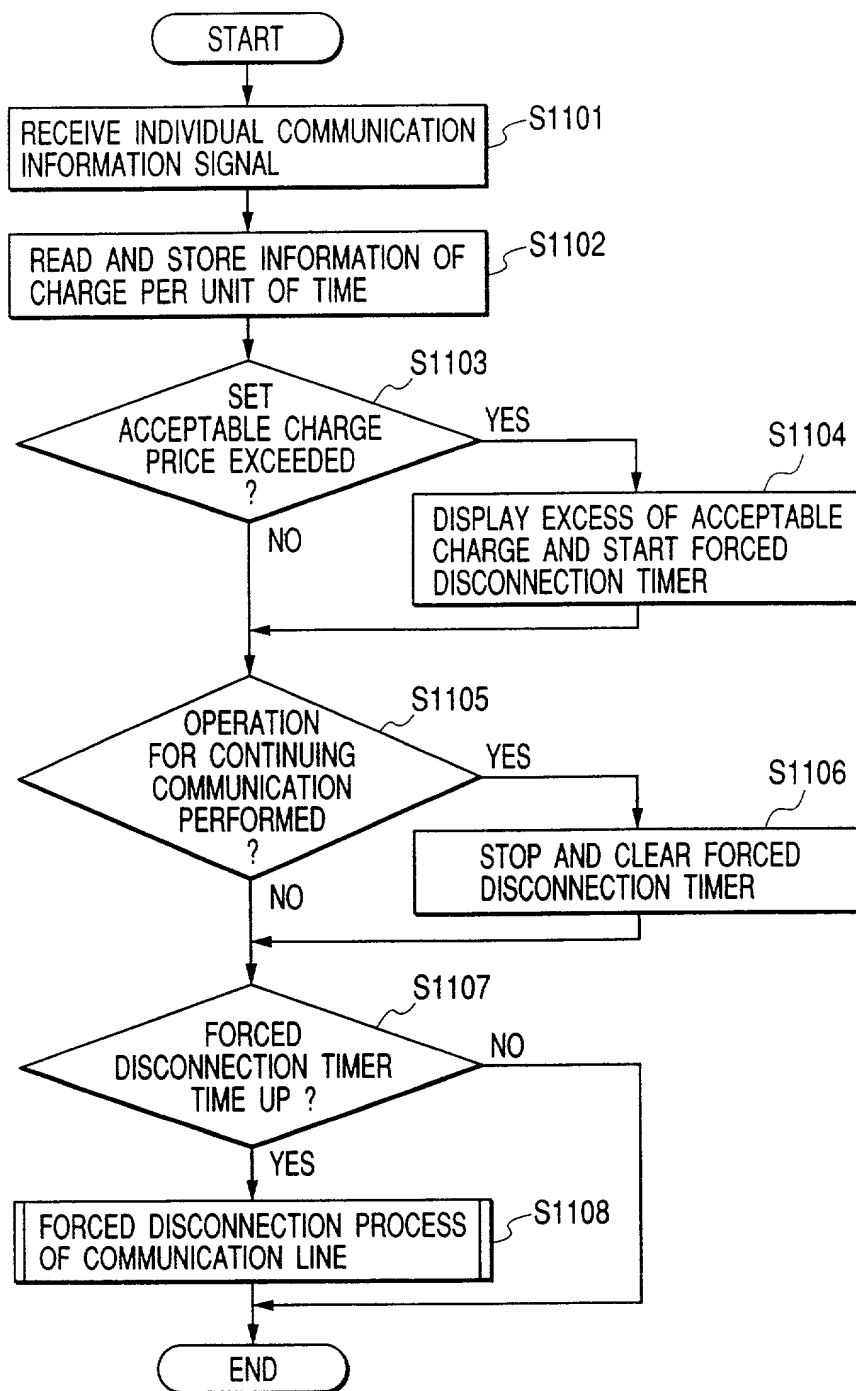

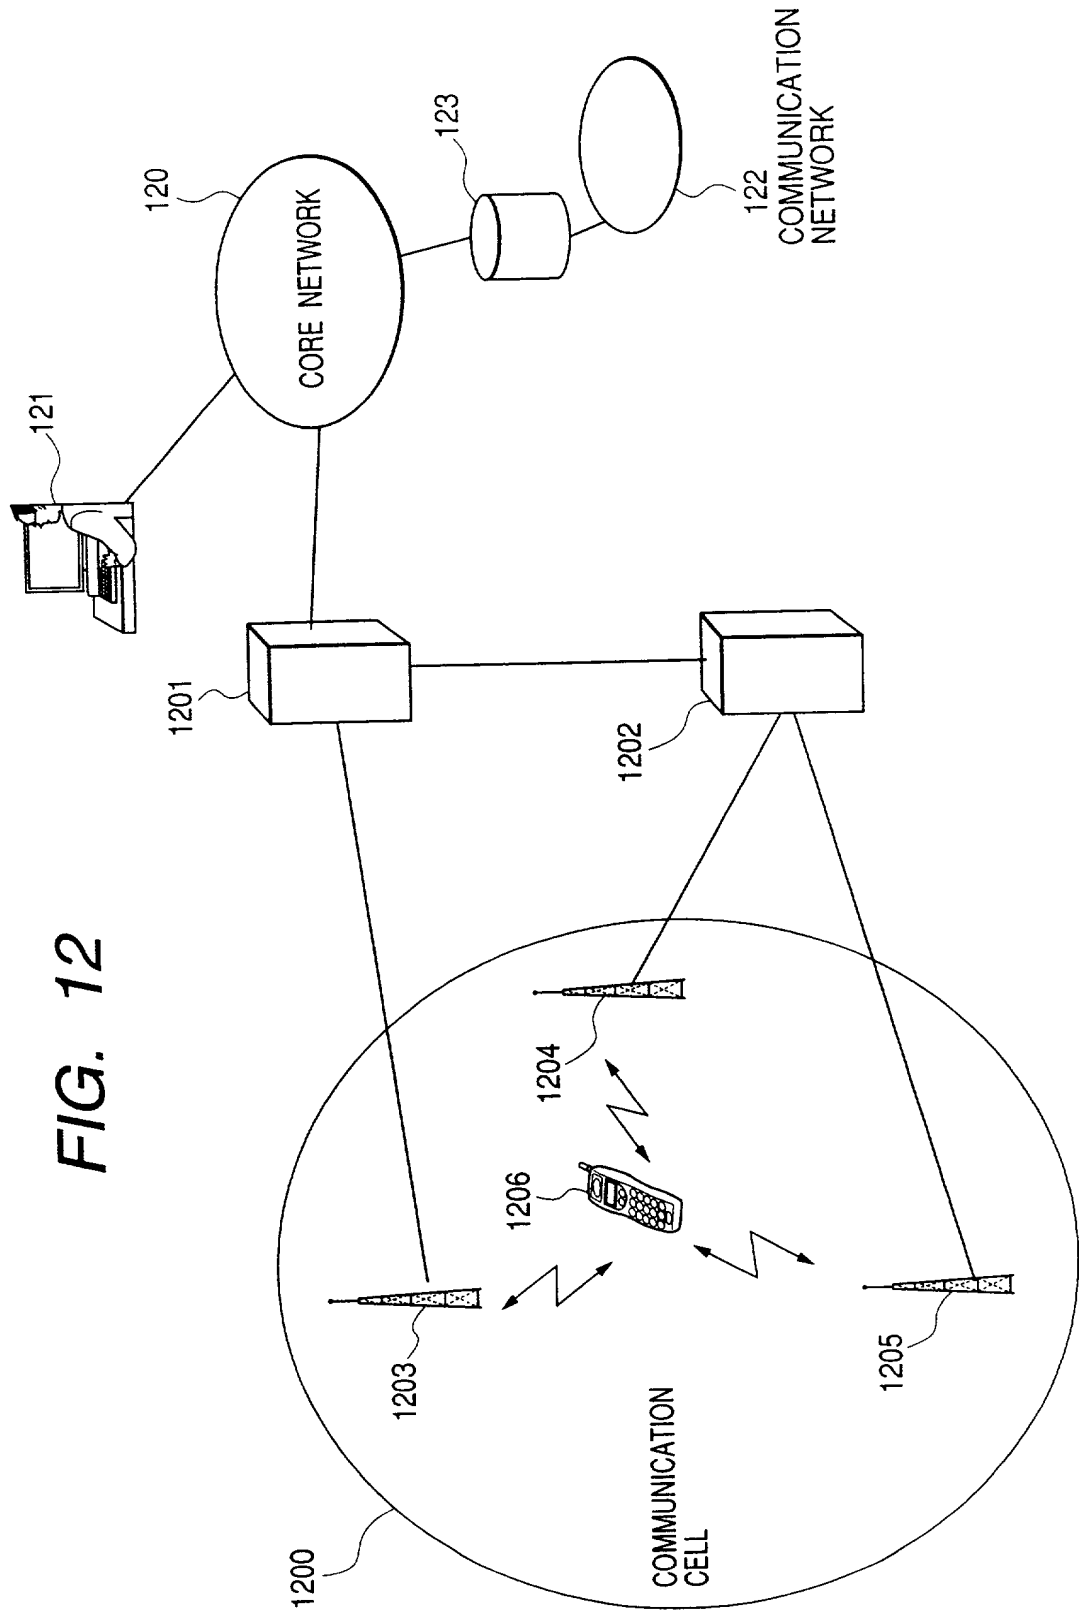


FIG. 12

FIG. 13

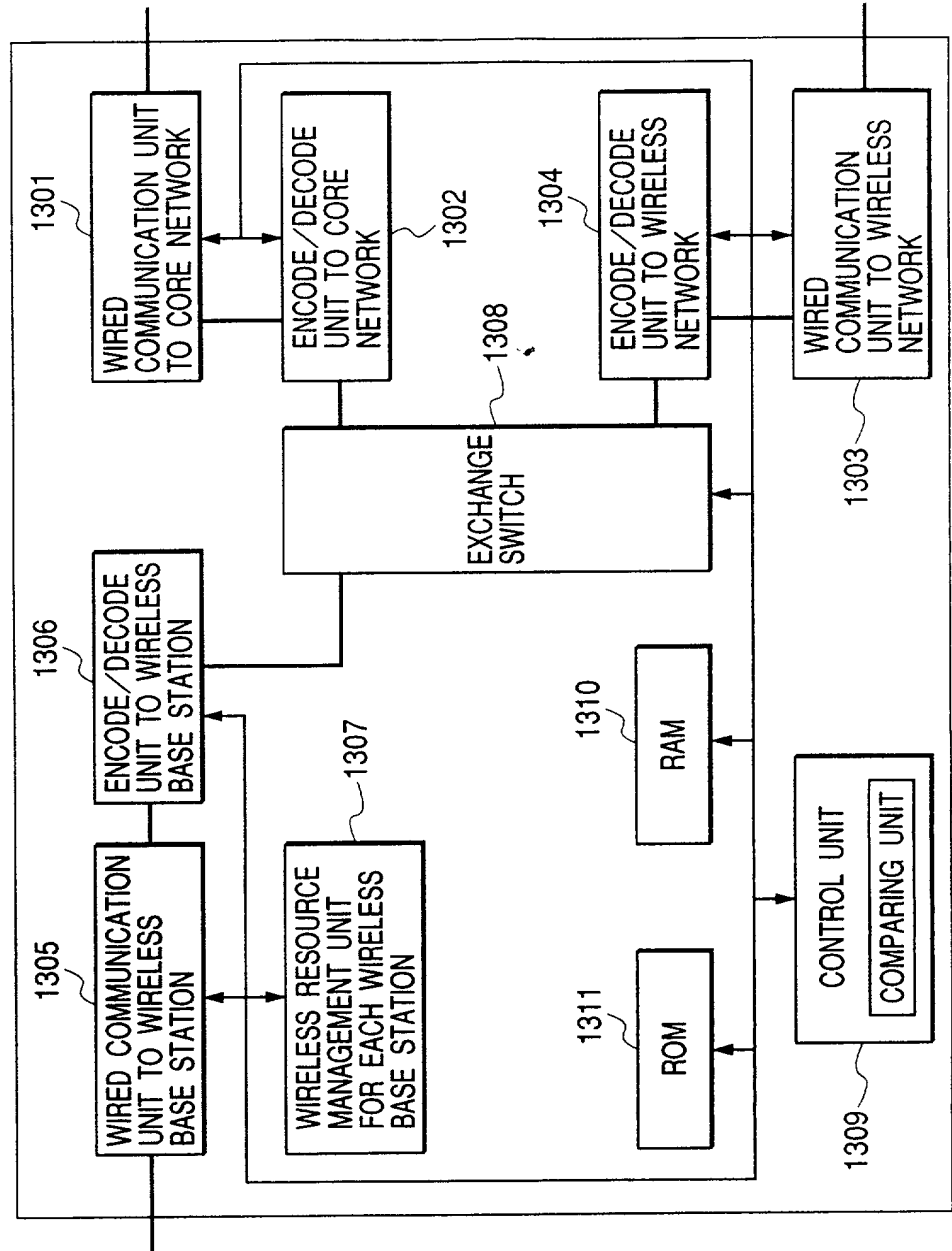


FIG. 14

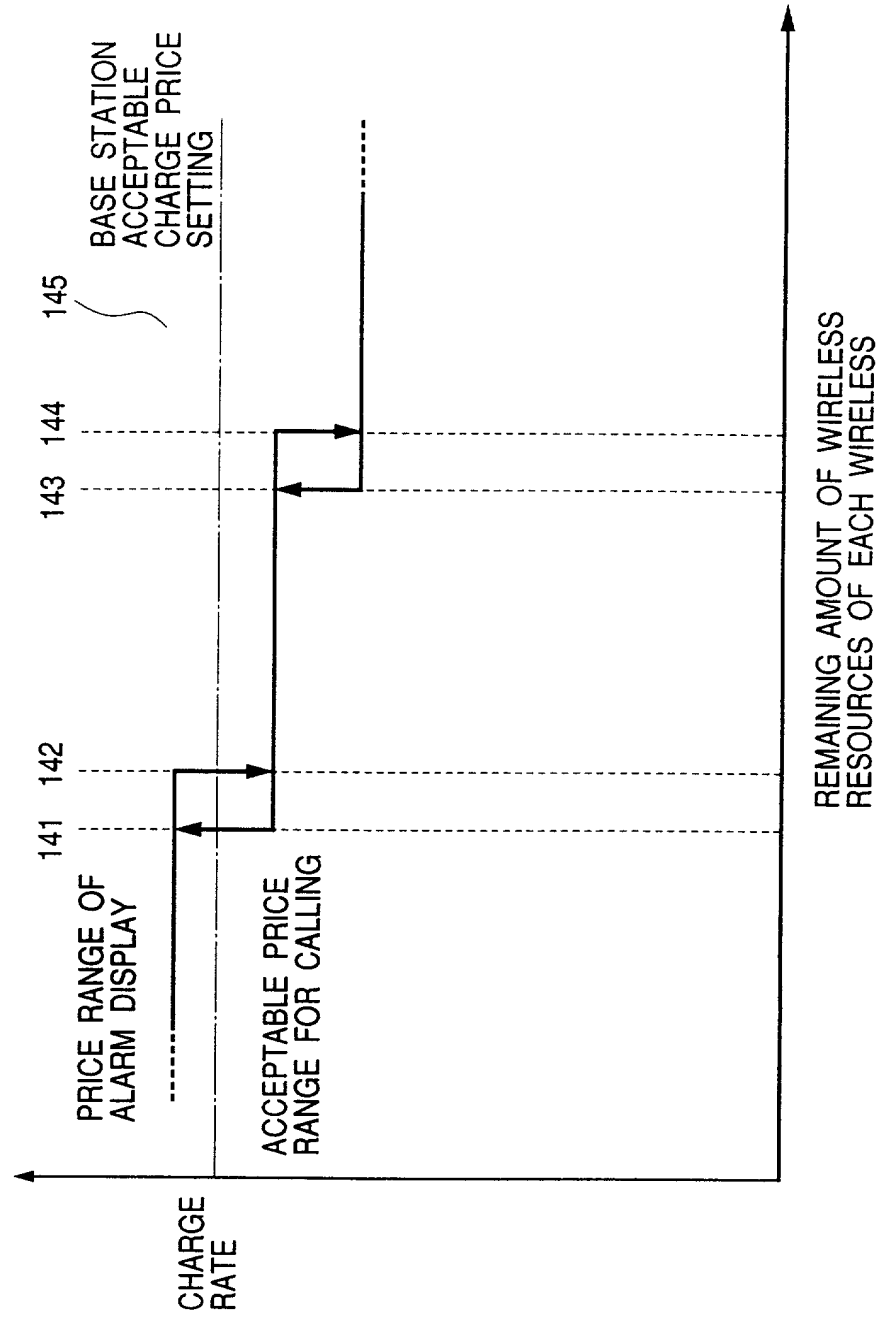


FIG. 15

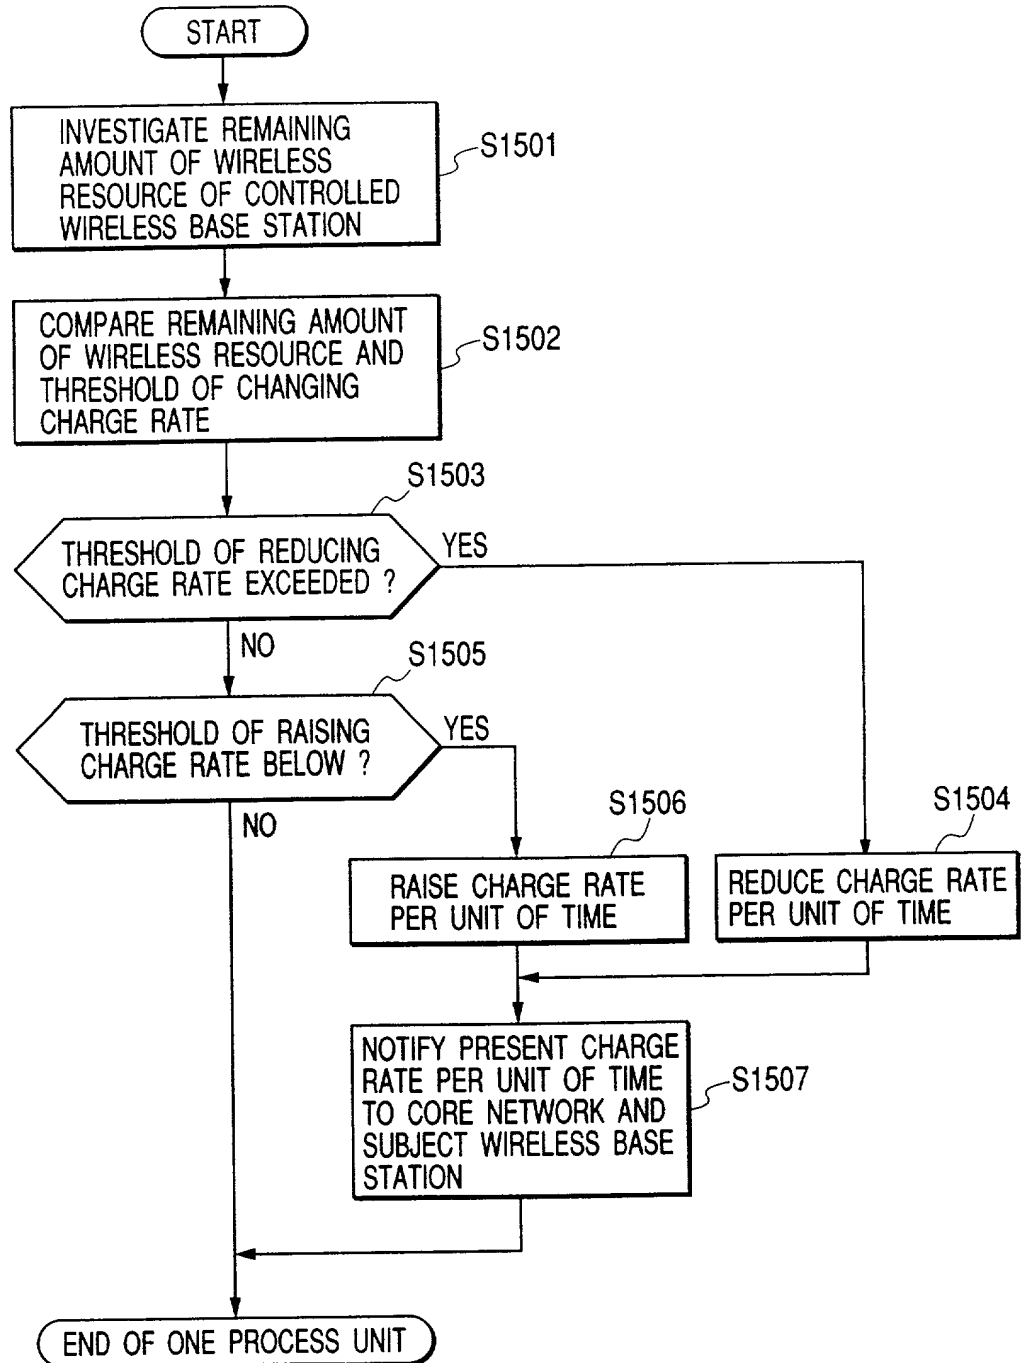


FIG. 16

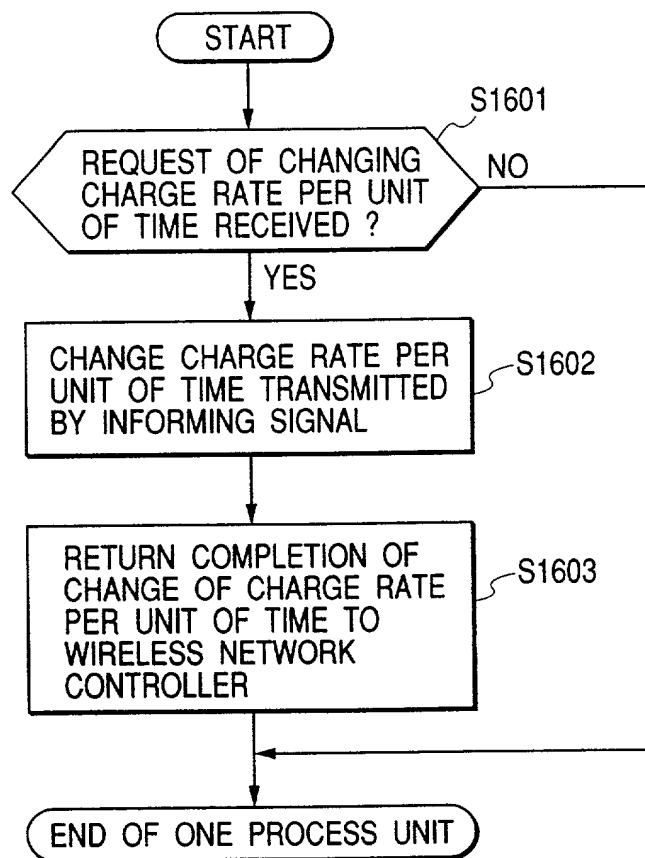


FIG. 17

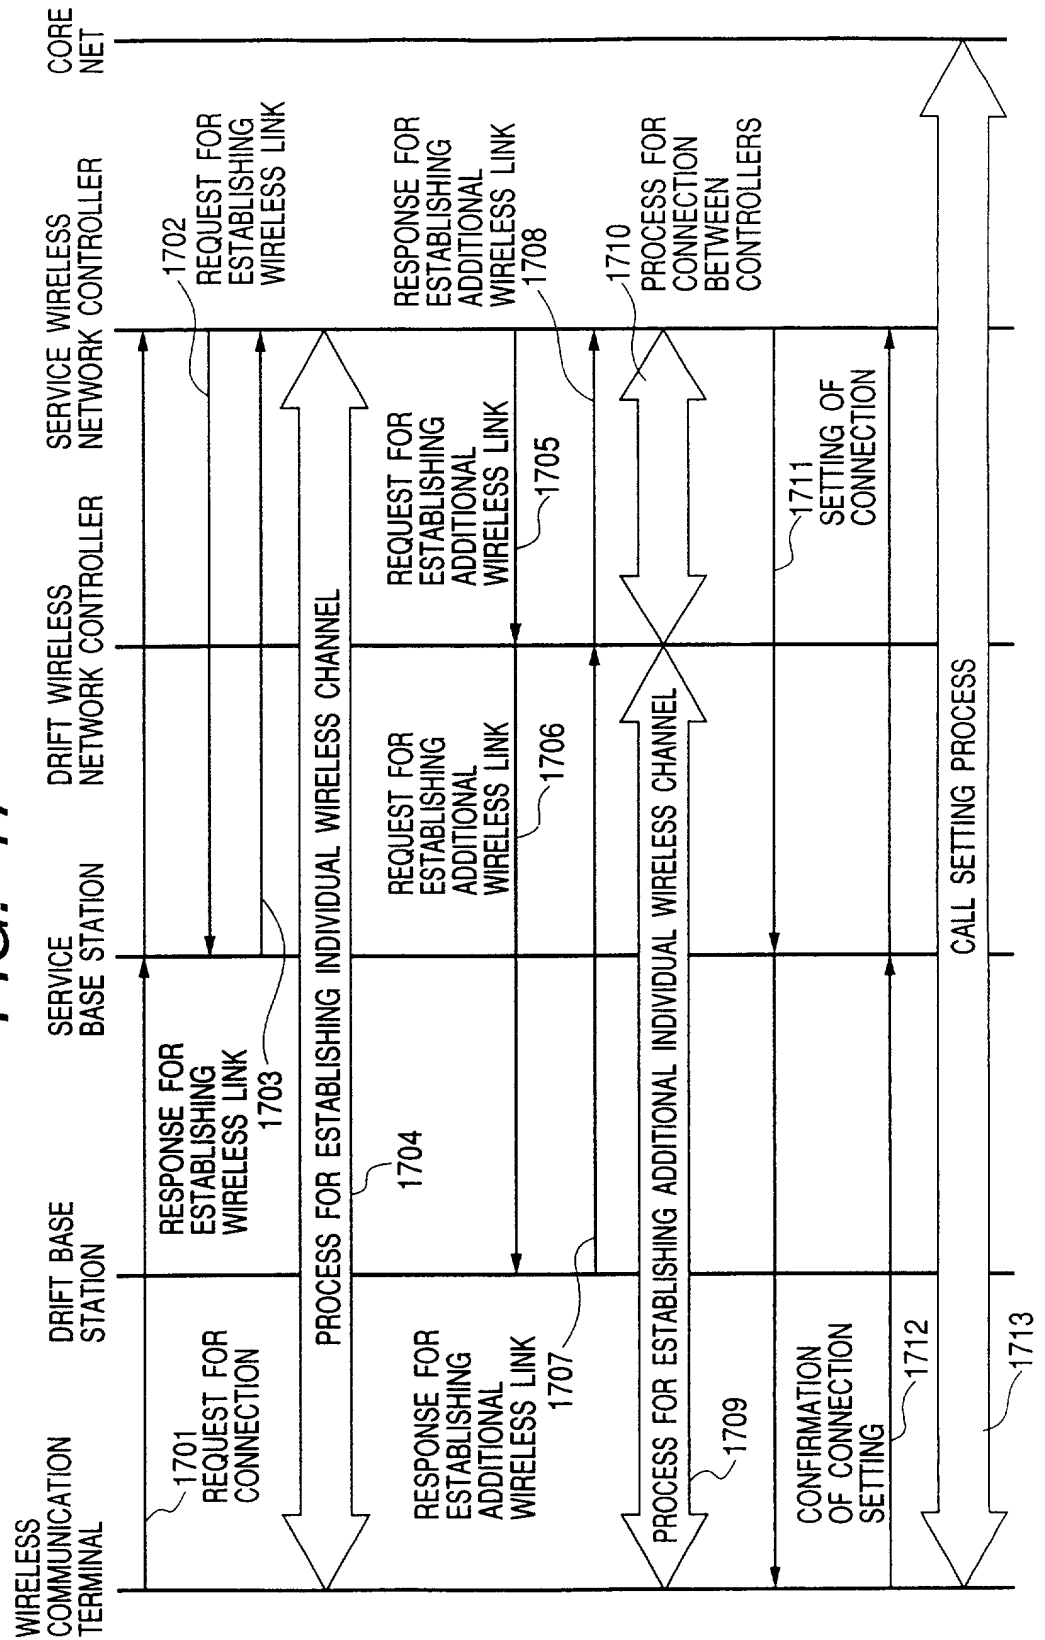


FIG. 18

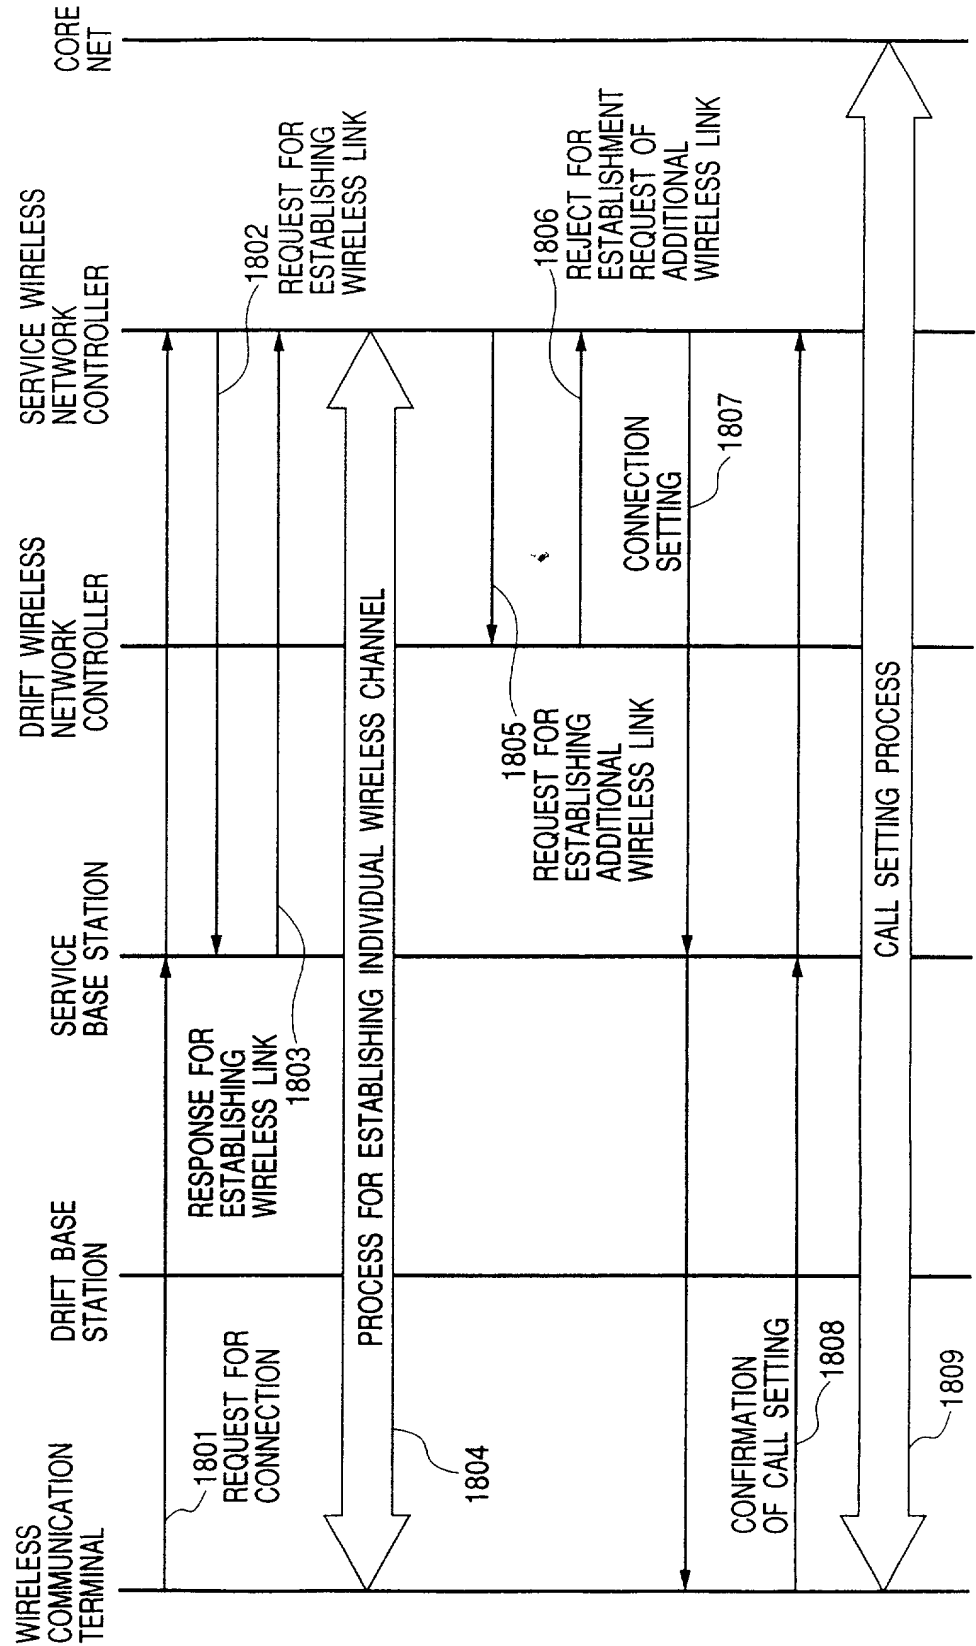


FIG. 19

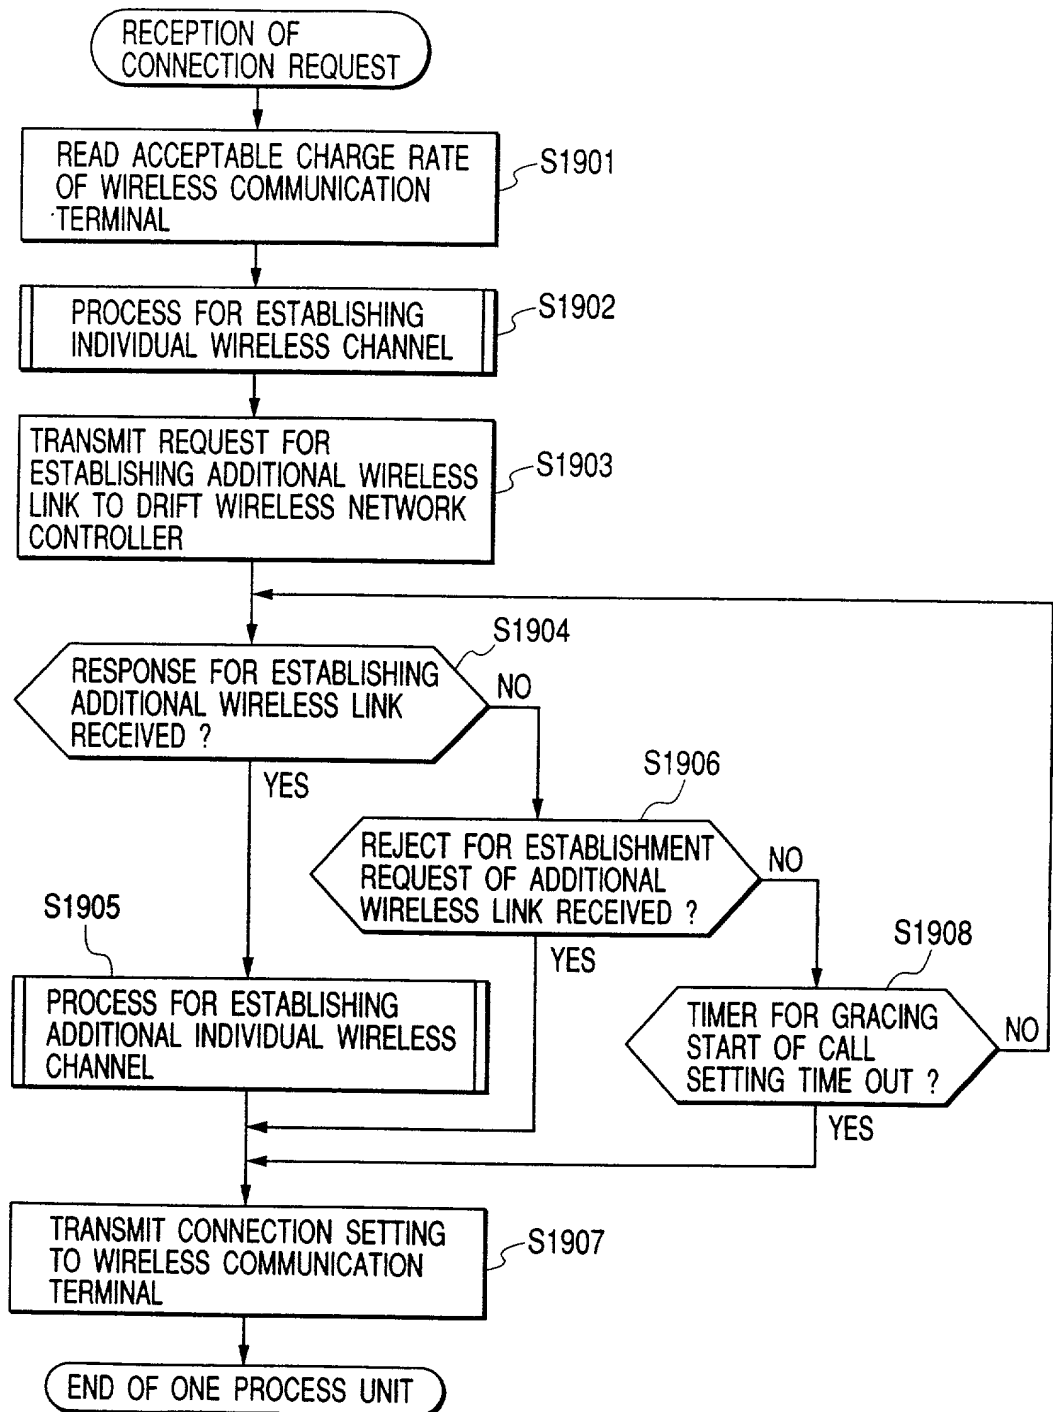


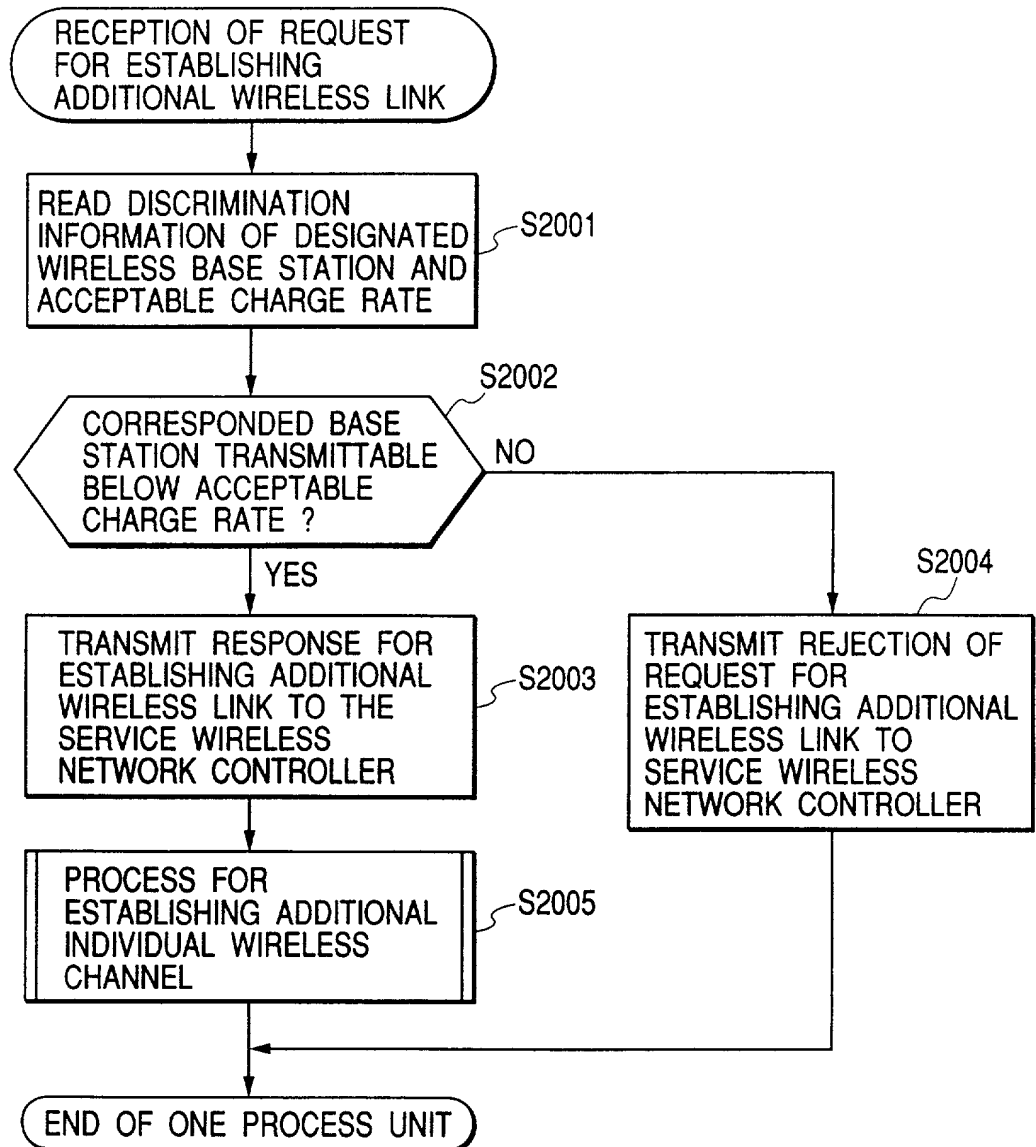
FIG. 20

FIG. 21


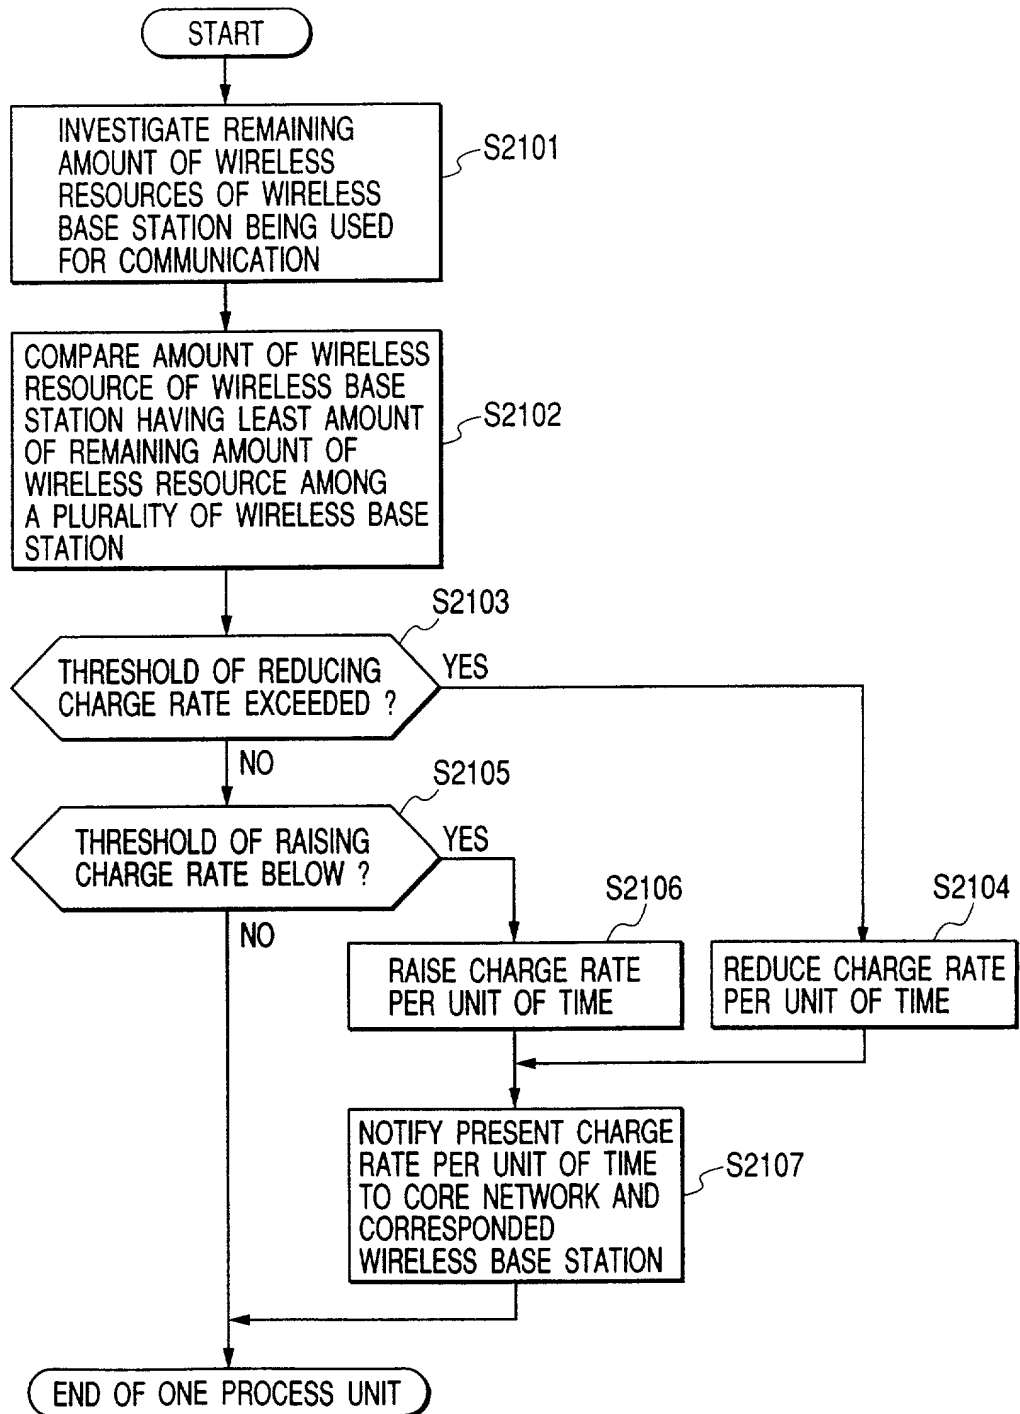


FIG. 22

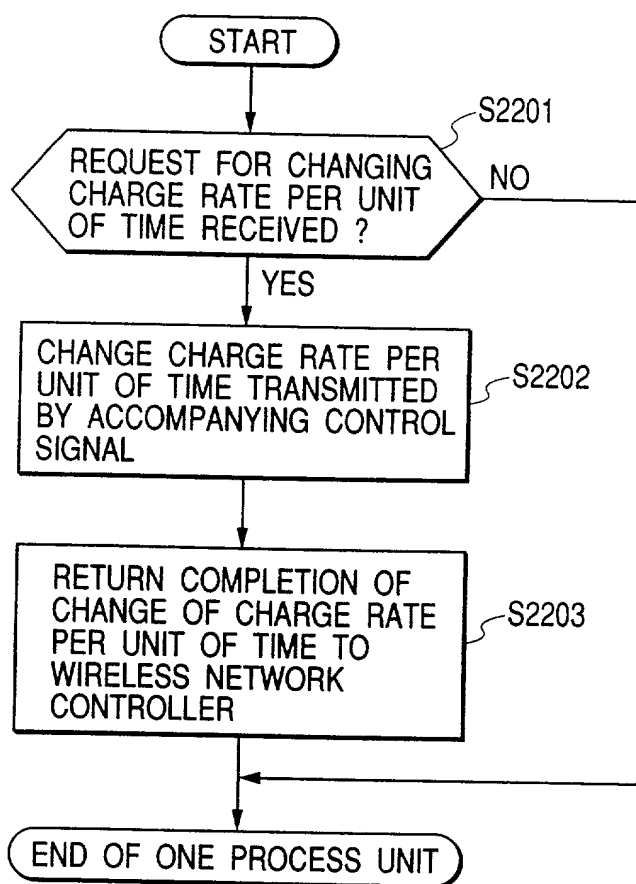

Docket No. 36409-00300

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

the specification of which

(check one)

- ☒ is attached hereto.
- ☐ was filed on _____ as United States Application No. or PCT
International Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

<u>11-281515</u> (Number)	<u>Japan</u> (Country)	<u>01/10/99</u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u>2000-297462</u> (Number)	<u>Japan</u> (Country)	<u>28/09/00</u> (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, 1 acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Christopher E. Chalsen, Esq.	Reg. No.: 30,936
John M. Griem, Jr., Esq.	Reg. No.: 40,005
James R. Klaiber, Esq.	Reg. No.: 41,902
W. Jackson Matney, Jr., Esq.	Reg. No.: 39,292
David H. Hwang, Esq.	Reg. No.: 38,697
Michael H. Jacobs, Esq.	Reg. No.: 41,870
Lawrence T. Kass, Esq.	Reg. No.: 40,671
Tedd W. Van Buskirk, Esq.	Reg. No.: 46,282
Christopher L. Holm, Esq.	Reg. No.: 39,227

Send Correspondence to:

Christopher E. Chalsen, Esq.
 Milbank, Tweed, Hadley & McCloy LLP
 1 Chase Manhattan Plaza
 New York, NY 10005-1413

Direct Telephone Calls to: *(name and telephone number)* Christopher E. Chalsen, Esq.
 (212) 530-5380

Full name of sole or first inventor	
Masashi Hamada	
Sole or first inventor's signature	Date
Residence	
23-18, Minami Karasuyama 4-chome, Setagaya-ku, Tokyo, Japan	
Citizenship	
Japan	
Post Office Address	
c/o Canon Kabushiki Kaisha, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan	